

TRUCK AND BUS TYRES

AEOLUS-TYRES.COM

AEOLUS

NO MATTER WHAT

NEO SERIES

04 About Aeolus Tyres

05 Hence Aeolus

06 NEO Series

08 Aeolus team

34 Steering axle
patterns and sizes

36 Drive axle patterns
and sizes

38 Trailer patterns
and sizes

40 All positions patterns
and sizes

42 Technical details

50 Regrooving



09 NEO Allroads

NEO Allroads S
NEO Allroads S+
NEO Allroads D
NEO Allroads D+
NEO Allroads T2

17 NEO Fuel

NEO Fuel S
NEO Fuel S+
NEO Fuel D
NEO Fuel D+
NEO Fuel T+



23 NEO Construct

NEO Construct G
NEO Construct D

27 NEO Winter

NEO Winter S
NEO Winter D

31 NEO Urban

NEO Urban G
NEO Urban D



Visit our website: www.aeolus-tyres.com

Ever since entering the European market (2004), we have been supplying tyres that offer the highest quality in their respective product segments. Tyres designed in accordance with European quality norms and ideal for the most demanding circumstances. We use high performance and the best price to guarantee our customers a low price per kilometre. **Aeolus. No matter what.**



We decided to take over Premium Brand in 2017 in order to reinforce our position in the international tyre market. We thought it would be a good idea to harness the strengths of a large Asian brand with those of a renowned European brand. A smart move because it has put us in an even better position to meet the needs of the tyre market. A useful move because it has given a massive boost to our logistical & technological developments.

AEOLUS TYRES

Total supplier

A tyre brand supplies tyres. Tyres in all sizes, with every pattern. Our products can be used anywhere for a variety of purposes. Truck and trailer tyres, bus tyres, OTR tyres, agricultural tyres, machine tyres, on and off-road tyres... you name it. This means you can do whatever you need, in all circumstances. Always.

Earthmoving

Robust, top quality and hard-wearing: essential characteristics for tyres also those used during earth-moving activities. These tyres come with an hour-based guarantee, which (depending on the vehicle and use) guarantees a minimum number of operating hours. We also offer the market a comprehensive range, which is capable of meeting all customer needs.

Our range of sizes and patterns, as well as our great price/quality ratio, takes care of the rest.

Agriculture

The agricultural sector is always on the move, which means so are we. It is nice to be a front-runner, when it comes to developing a wide range of tyres (specials) with strong casings and ingenious patterns, but nothing more than that. That is why we always examine what is going on around us: looking for opportunities and chasing innovations & developments. Because being a front-runner is about being smart. And you are smart if you remain on your toes and know what is happening in your surroundings. This is something we have always known.



**Truck
Earthmoving
Agriculture**

Our tyres are for your benefit. For experts that know how rough outdoor terrains can be; for specialists familiar with the pain that accompanies bad roads. Day in, day out. That is why we develop the best performing, strongest and most innovative tyres. But also because we are able to. And when doing so, only the best is good enough. In a way, we see tyre patterns as the noise produced by a Harley Davidson. So stimulate, challenge or provoke us. We will do anything to achieve our ultimate goal: tyres for all weather conditions, all distances and all surfaces. **Aeolus. No matter what.**

NO MATTER WHAT



Quality

We develop and produce tyres in accordance with the international norms of renowned institutes and certifications. Our casing guarantee, as well as our partnership with Premium Brand, guarantees high basic quality.



Availability

Just about all sizes and patterns are available from stock, which means our products are very easy to obtain. For instance, we always have 30,000 tyres in stock at our three different warehouses.



Service

Instead of empty promises, Aeolus offers proven quality: ranging from our qualified and helpful sales and service team, to our Aeolus Breakdown service all throughout Europe.



Price

With core competencies like quality, sustainability and quality, we are the leading alternative for renowned premium brands. The best price per kilometre takes care of the rest.



Wide range

We have a very wide range of products, which offers solutions for almost all purposes involving trucks, earth-moving machines, forestry & agricultural machines as well as special vehicles.



Sustainability

We continuously invest in environment-friendly production and comply with the ambitious norms of the 'Waste Zero Emission' label and the REACH programme.



Research & development

Together with Premium Brand, our engineers and technicians are always on the look-out for new ways to improve the tyres we offer, so they continue to meet the needs of the market.



Aeolus Breakdown Service (24/7)

Back on the road quickly after a puncture. Our Breakdown service will help you to get back on the road as soon as possible: 24 hours a day, 365 days a year, all throughout Europe. We help you to minimise lost time.



Aeolus Casing Management

Environment-friendliness and sustainability pay dividends for transporters: casings that are suitable for tread renewal are purchased and useless casings are disposed of in accordance with applicable norms.

NEO SERIES

THE ULTIMATE TRUCK TYRE

The NEO series: produced in accordance with the latest technological developments and compliant with the strict needs and preferences of European users. Tyres that are perfectly in keeping with our ambition; to position Aeolus as a top tyre brand all across the globe. A series based on the perfect balance between research, design & technology.

How? By implementing the SATT casing structure and optimising rubber compounds: a great piece of innovation that allows kilometrages to be improved by 25%. Our partnership with Premium Brand has been extremely valuable and given the NEO series a huge boost in the tyre market. The Ultimate Truck Tyre.



NEO FUEL S

NEO ALLROADS D+

NEO ALLROADS T2

NEO URBAN G

NEO CONSTRUCT D




DLT/HSCC rubber compound
European rubber compound with high silicone content, for high kilometrage and better grip on wet road surfaces.




SATT casing structure
Patented European 'SATT' casing design. The 3SB casing ensures uniform wear & tear and a long life-span.




FRC
Extremely strong 'Full Penetration' structure of belt layers, which prevents casing fatigue and offers excellent protection against punctures.

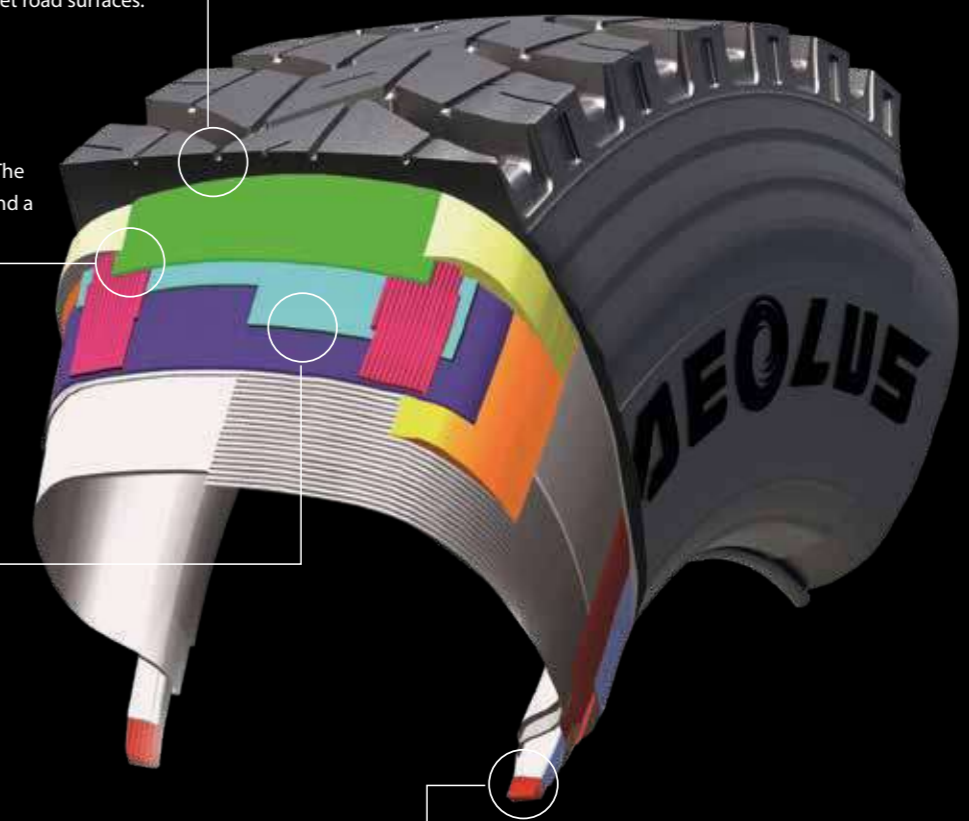

The NEO Series are produced with European know-how and technology



HBW
Patented hexagonal bead wire. Offers better driving comfort and makes the tyre easier to mount.

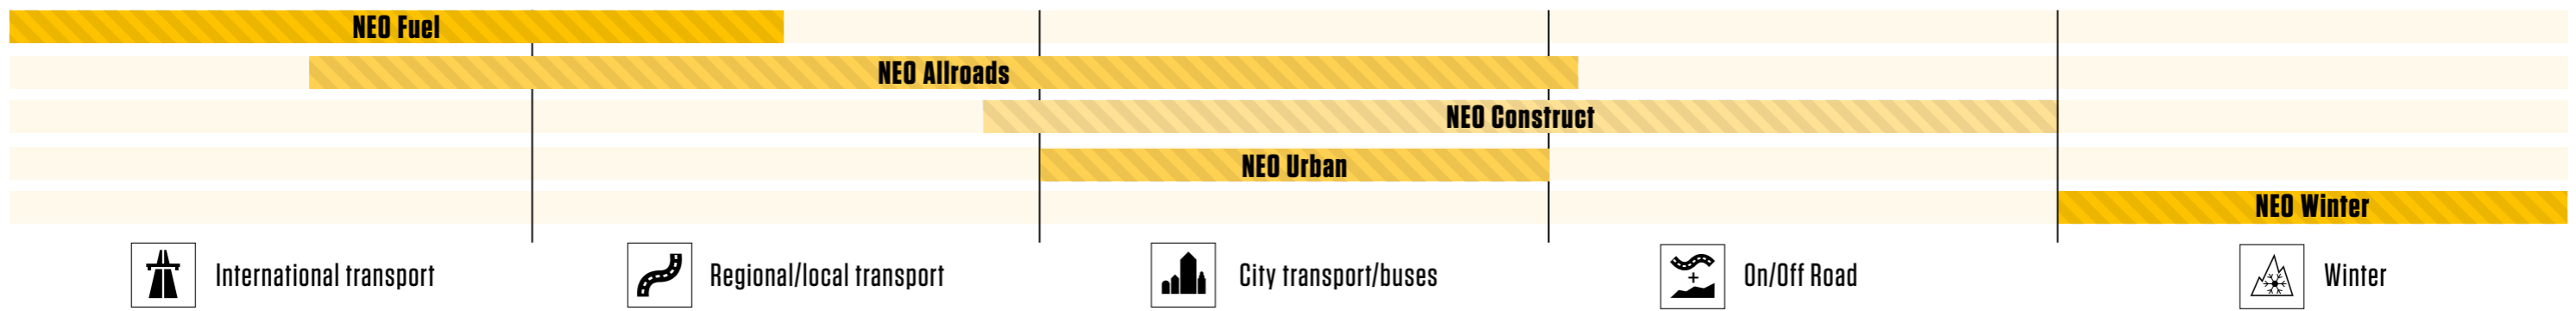



AEOLUS TEAM EUROPE

A top quality team is needed when developing and producing top quality tyres. Thankfully, we already have such a team. It's also good to know that our leading position is allowing us to attract the best people: professionals with the required expertise; people that value personal attention and pleasant customer contact.

info@aeolus-tyres.com

Visit our website: www.aeolus-tyres.com

NEO ALLROADS



FIT FOR USAGE UNDER EVERY CONDITION,
ON ALL ROADS



The NEO Series are produced with European know-how and technology


AEOLUS

NO MATTER WHAT




NEO ALLROADS S

- Suitable for Euro 6 legislation (High Load)
- Long life-span thanks to extra wide and extra deep pattern
- Safe driving and braking thanks to intelligent pattern with 4 Z-shaped longitudinal grooves
- Perfect handling on dry and wet surfaces thanks to refined pattern structure
- Noise-friendly due to optimised pattern design
- Ingenious rubber mix ensures balanced heat control
- Resistant against stone build-up due to interchanging pattern grooves

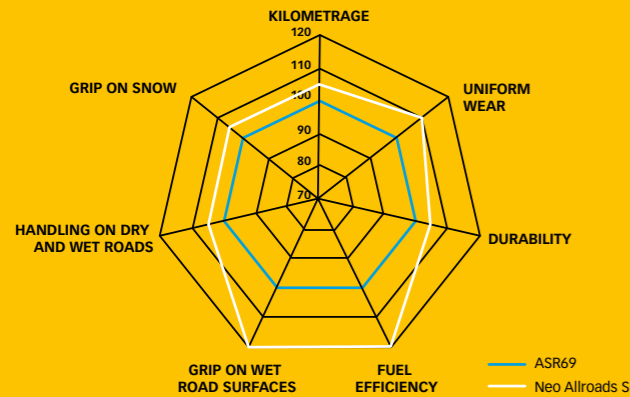

NEO ALLROADS S+

- Long life-span due to extra wide and extra deep pattern
- Safe driving and braking thanks to intelligent pattern with 4 Z-shaped longitudinal grooves
- Perfect handling on dry and wet surfaces thanks to refined pattern structure
- Resistant against stone build-up due to interchanging pattern grooves
- Extra belt layer reinforces casing and improves re-profiling
- Long life-span thanks to extra anti-wear layer in tread compound

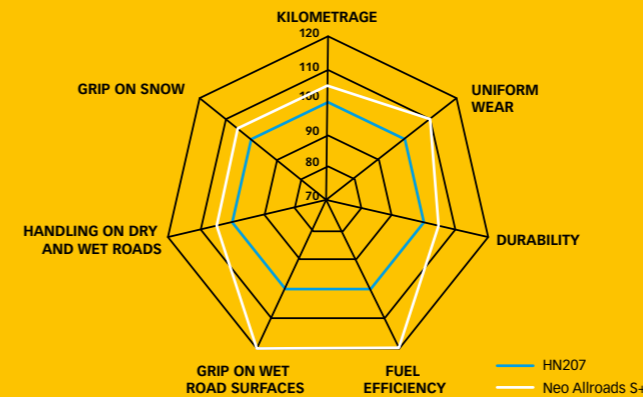

Size	L/S Index	TL/TT	M+S				DB	Class	Available
205/75R17.5	124/122M	TL	M+S						2023
215/75R17.5	126/124M	TL	M+S		D	C	72	B	Immediately
225/75R17.5	129/127M	TL	M+S						2023
235/75R17.5	132/130M	TL	M+S		D	C	72	B	Immediately
245/70R17.5	136/134M	TL	M+S		D	C	72	B	Immediately
265/70R19.5	140/138M	TL	M+S		C	B	72	B	Immediately
285/70R19.5	145/143M (146/144L)	TL	M+S		C	C	72	B	Immediately
295/60R22.5	149/146L (150/147K)	TL	M+S						2023
295/80R22.5	154/149M	TL	M+S		D	C	72	B	Immediately
315/70R22.5	156/150L (154/150M)	TL	M+S		B	B	73	B	Immediately
315/80R22.5	158/150L (154/150M)	TL	M+S		B	A	73	B	Immediately

Size	L/S Index	TL/TT	M+S				DB	Class	Available
385/55R22.5	160K (158L)	TL	M+S		C	B	74	B	Immediately
385/65R22.5	164K (158L)	TL	M+S		B	A	73	B	Immediately


NEO Allroads in the spotlight:

Check out the NEO-series in at www.aeolus-tyres.com




NEO ALLROADS D

- Suitable for regional distribution traffic
- High traction thanks to extra deep grooves with pattern featuring block design
- Pattern featuring inter-connected blocks extends life-span
- Extra quiet and comfortable thanks to sophisticated a-symmetrical block design
- Uniform wear thanks to reinforced shoulder design
- Extra belt layer reinforces casing and improves re-profiling
- Anti-wear layer in tread compound improves economy, noise and kilometrage

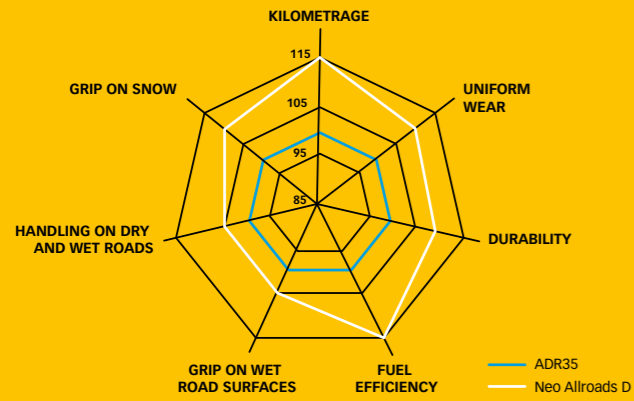

NEO ALLROADS D+

- Excellent life-span thanks to wider directional pattern design with deeper grooves
- Perfect handling on dry and wet surfaces thanks to refined pattern structure (3D sipes)
- Extra belt layer (FRC) reinforces casing, improves re-profiling and enables re-profiling
- Lasting high traction thanks to special groove design (sipes)
- Uniform wear thanks to reinforced shoulder design (RSR)
- Long life-span thanks to extra anti-wear layer in tread compound and special groove design (sipes)

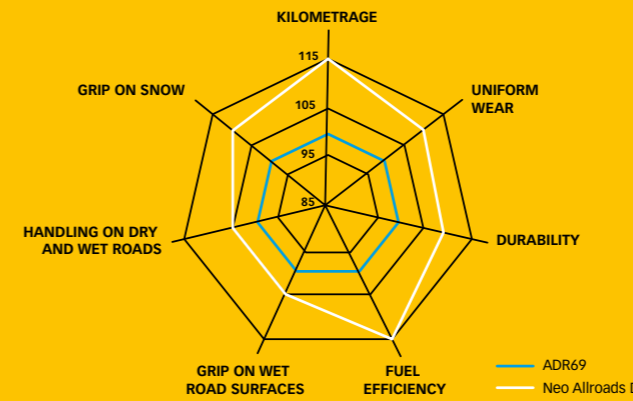

012

013

Size	L/S Index	TL/TT	M+S				DB	Class	Available
205/75R17.5	124/122M	TL	M+S						2023
215/75R17.5	126/124M	TL	M+S		D	C	74	B	Immediately
225/75R17.5	129/127M	TL	M+S						2023
235/75R17.5	132/130M	TL	M+S		D	C	74	B	Immediately
245/70R17.5	136/134M	TL	M+S		D	C	73	B	Immediately
265/70R19.5	140/138M	TL	M+S		D	C	74	B	Immediately
285/70R19.5	146/144L (145/143M)	TL	M+S		C	B	74	B	Immediately

Size	L/S Index	TL/TT	M+S				DB	Class	Available
295/60R22.5	150/147K (149/146L)	TL	M+S		D	B	75	B	Immediately
295/80R22.5	152/148M	TL	M+S		E	B	74	B	Immediately
315/60R22.5	152/148L	TL	M+S		D	C	73	B	Immediately
315/70R22.5	154/150L (152/148M)	TL	M+S		C	C	76	B	Immediately
315/80R22.5	156/150L (154/150M)	TL	M+S		D	B	75	B	Immediately


NEO Allroads in the spotlight:

Check out the NEO-series in at www.aeolus-tyres.com




NEO ALLROADS T2

- Flatbed trailer tyre suitable for heavy loads
- Effective handling thanks to intelligent pattern with 4 Z-shaped longitudinal grooves
- Extra quiet and comfortable thanks to sophisticated a-symmetrical block design
- Resistant against stone build-up due to interchanging pattern grooves
- Uniform wear thanks to reinforced shoulder design
- Tread compound for low rolling resistance and effective heat discharge

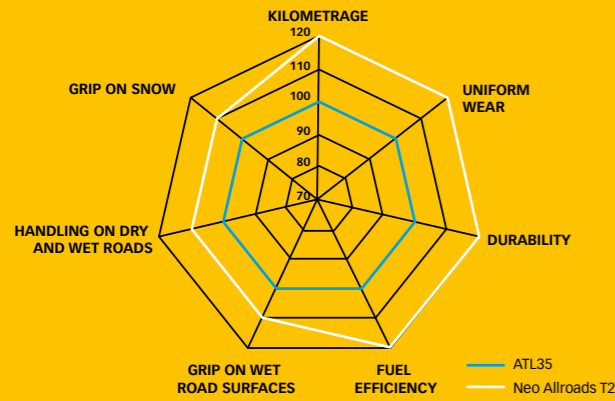

NEO ALLROADS T2

- Excellent life-span thanks to wider directional pattern design with deeper grooves
- Perfect handling on dry and wet surfaces thanks to refined pattern structure (3D sipes)
- Extra belt layer (FRC) reinforces casing, improves re-profiling and enables re-profiling
- Lasting high traction thanks to special groove design (sipes)
- Uniform wear thanks to reinforced shoulder design (RSR)
- Long life-span thanks to extra anti-wear layer in tread compound and special groove design (sipes)

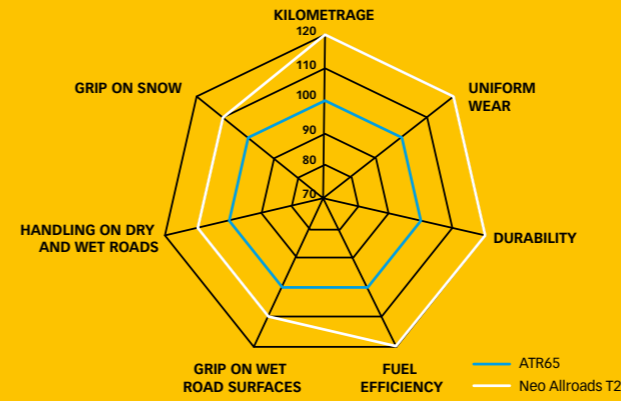

014

015

Size	L/S Index	TL/TT	M+S			DB	Class	Available
215/75R17.5	135/133J	TL	M+S		C C	73	B	Immediately
235/75R17.5	143/141J (144/144F)	TL	M+S		C C	73	B	Immediately
245/70R17.5	143/141J (146/146F)	TL	M+S		C B	73	B	Immediately
265/70R19.5	143/141J (146F)	TL	M+S		C C	72	B	Immediately

Size	L/S Index	TL/TT	M+S			DB	Class	Available
285/70R19.5	150/148J	TL	M+S		C C	71	B	Immediately
385/55R22.5	160K (158L)	TL	M+S		C C	74	B	Immediately
385/65R22.5	164K (158L)	TL	M+S		B B	73	B	Immediately
425/65R22.5	165K	TL	M+S		C C	73	B	Immediately
445/65R22.5	169K	TL	M+S		C B	74	B	Immediately

DARE US!



NOTHING CAN STOP US.

No road, no weather, no distance. So captivate and challenge us... because that is what motivates us. Considering this, it's a little weird that it has taken so long to launch our two-year guarantee. But even so, we are still one of the first companies to do so.

No matter what.

For further information and the conditions, visit
aeolus-tyres.com/warranty

AEOLUS

NO MATTER WHAT.

NEO Series - The Ultimate Truck Tyre

NEO Fuel

NEO FUEL

LONG DISTANCE,
LESS FUEL




The NEO Series are produced with European know-how and technology

AEOLUS



NO MATTER WHAT

1017




NEO FUEL S

- Suitable for Euro 6 legislation (High Load)
- Water discharge and handling thanks to pattern with connected blocks and 4 longitudinal grooves
- Temperature control at high speeds thanks to special groove design (sipes)
- Long life-span due to Z-shaped asymmetrical pattern that prevents stone build-up
- Anti-wear layer in tread compound improves fuel economy, kilometrage and life-span
- Full multi-layer structure makes casing strong and suitable for regrooving
- Uniform wear thanks to reinforced shoulder design

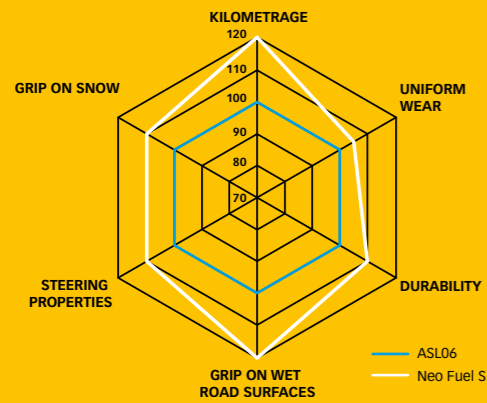

NEO FUEL S+

- This steering axle tyre is specially designed for long distances
- Special rubber compound for low rolling resistance and increased mileage
- Wide casing construction with extra strong shoulders for more stability
- With High-Load specification for Euro 6 trucks
- With 3PMSF label

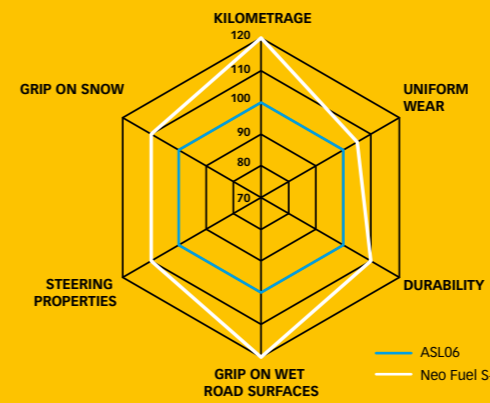



018

019

Size	L/S Index	TL/TT	M+S			DB	Class	Available
295/60R22.5	150/147K (149/146L)	TL	M+S		D C	72	B	Immediately
315/70R22.5	156/150L (154/150M)	TL	M+S		B B	72	B	Immediately
315/80R22.5	158/150L (154/150M)	TL	M+S		B C	71	A	Immediately


Size	L/S Index	TL/TT	M+S			DB	Class	Available
295/80R22.5	154/149M	TL	M+S		B B	72	B	Immediately
315/60R22.5	154/148L	TL	M+S		B C	73	B	Immediately

NEO Fuel in the spotlight: Check out the NEO-series in at www.aeolus-tyres.com




NEO FUEL D

- Drive axle tyre, specially designed for long distances
- Extremely high kilometrages and performance thanks to wide pattern
- High traction on wet and dry roads thanks to pattern with longitudinal grooves and block pattern
- Anti-wear layer in tread compound improves fuel economy, kilometrage and life-span
- Full multi-layer structure makes casing extra strong
- Two tread layers ensure long life-span and low fuel consumption

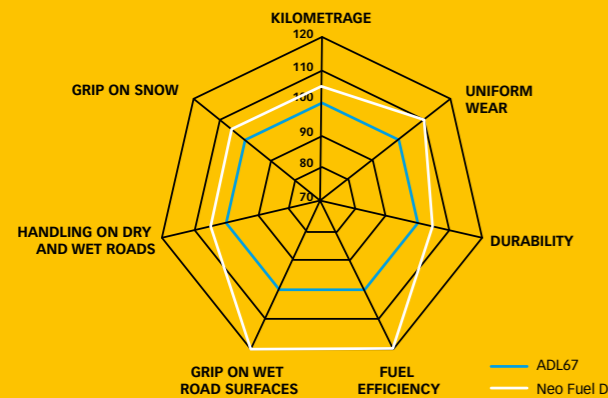

NEO FUEL D+

- Drive axle tyre, specially designed for long distances
- Extremely high kilometrages and performance thanks to wide pattern
- High traction on wet and dry roads thanks to pattern with longitudinal grooves and block pattern
- A decent wear pattern and good mileage by specially designed shoulder profile that ensures the correct division of the contact pressure

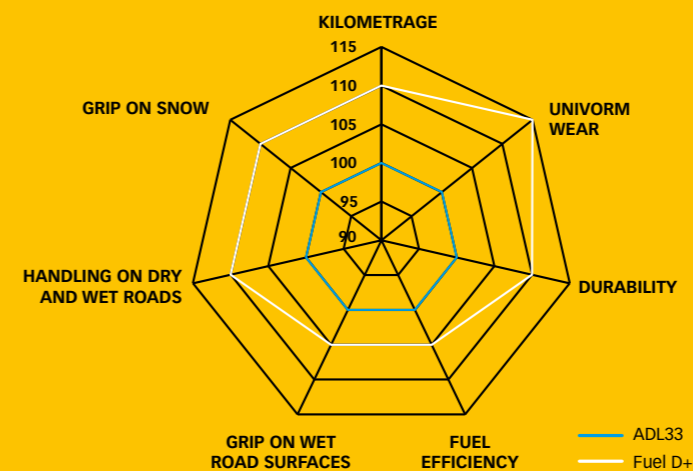

Size	L/S Index	TL/TT	M+S				DB	Class	Available
295/60R22.5	150/147K (149/146L)	TL	M+S		D	C	72	A	Immediately
315/60R22.5	152/148L	TL	M+S		C	C	73	B	Immediately
315/70R22.5	154/150L (152/148M)	TL	M+S		C	C	73	A	Immediately
315/80R22.5	156/150L (154/150M)	TL	M+S		C	C	73	A	Immediately

Size	L/S Index	TL/TT	M+S				DB	Class	Available
12R22.5	152/149M	TL	M+S		C	C	73	B	2023
295/80R22.5	152/149M	TL	M+S		B	C	73	A	Immediately
315/60R22.5	152/148L	TL	M+S		C	C	73	B	Immediately

NEO Fuel in the spotlight: Check out the NEO-series in at www.aeolus-tyres.com

REFERENCE

H.M. VERPLOEGEN CHOOSES AEOLUS



H.M. Verploegen is a third-generation transport company, a real family business that has been on the road for its customers inland and abroad for many years. Where the working area used to be the Nijmegen region, it is now the Benelux, (west) Germany and especially France, specialising in groupage transport and its distribution in the countries mentioned above. In addition to the head office in Wijchen, Verploegen has two other branches, one in Düsseldorf Germany and one in Lyon France.

Verploegen is also affiliated to the French transport network Tredunion and to the POLE distribution network, which carries out distribution within the French borders. It is obvious that Verploegen attaches great importance to the image of its fleet. There are now 45 tractor units and 85 trailers, all painted in the same well-known house style, a business card of which the drivers are also very proud.




NEO SERIES

WITH 100% WARRANTY!



For further information and the conditions, visit aeolus-tyres.com/warranty




NEO Fuel T+



NEO FUEL T+

- Trailer tyres, specially designed for international transport
- Perfect water and heat discharge thanks to pattern with 6 longitudinal grooves
- Uniform wear thanks to special shoulder design (RSR)
- Perfect grip and handling in bends on wet and dry roads thanks to unique pattern design
- Full multi-layer structure makes casing extra strong
- Special tread compound improves fuel economy on long journeys

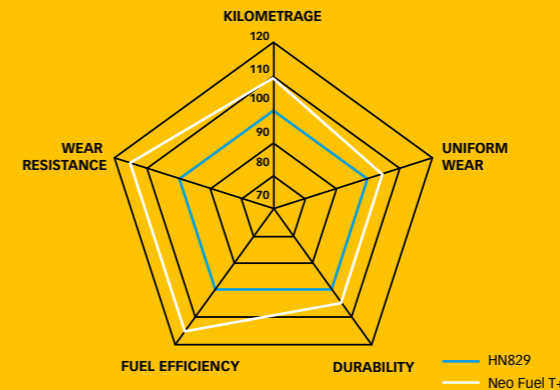

Size	L/S Index	TL/TT	M+S				DB	Class	Available
435/50R19.5	160J	TL	M+S		C	C	73	B	Immediately

022

023

Aeolus AR28

THE ULTIMATE HEAVY DUTY TYRE

NO MATTER WHAT.

ROBUST CASING STRUCTURE

SYMMETRICAL BLOCK PATTERN

SPECIAL RUBBER COMPOUND TECHNOLOGY

NEW!

AR28+ AR28



Size	L/S Index	TRA Code	Rim	Dimensions		Pattern depth(mm)	Air pressure (bar)
				Width	Diameter		
385/95R25	170F	E-2	10.00/1.5	389	1363	24	9,00
445/95R25	174F	E-2	11.25/2.0	444	1486	26	9,00

AEOLUS-TYRES.COM

NEO Series - The Ultimate Truck Tyre

NEO Construct

NEO CONSTRUCT


THE BEST PERFORMING, THE LONGEST LASTING,
THE STRONGEST



AEOLUS
NO MATTER WHAT


0241

025




NEO CONSTRUCT G

- Excellent self-cleansing properties thanks to interchanging pattern design
- Minimum wear due to extremely stiff pattern design
- Special transverse grooves improve traction and prevent irregular wear
- Wider and deeper transverse grooves improve kilometrage
- Optimised heel and heel-core design for heavy loads
- Uniform wear thanks to special shoulder design
- Long life-span thanks to extra anti-wear layer

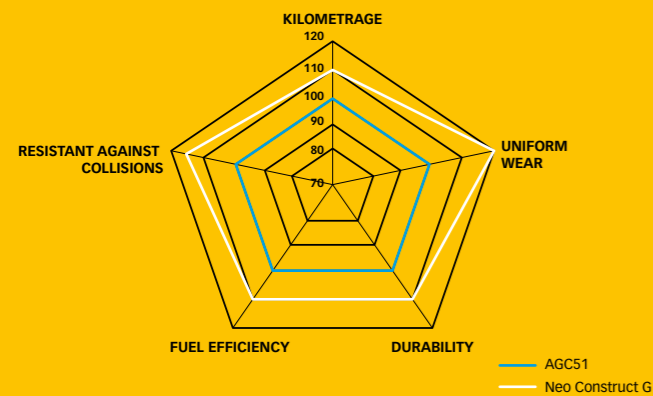

NEO CONSTRUCT D

- Extra wide and deep transversal grooves for perfect driving behaviour
- Extra-stiff tread thanks to block design featuring inter-connected blocks
- Advanced shoulder design offers maximum grip
- Optimised heel and heel-core design for heavy loads
- Excellent resistance against punctures and damage
- Uniform wear thanks to special shoulder design
- Long life-span thanks to extra anti-wear layer

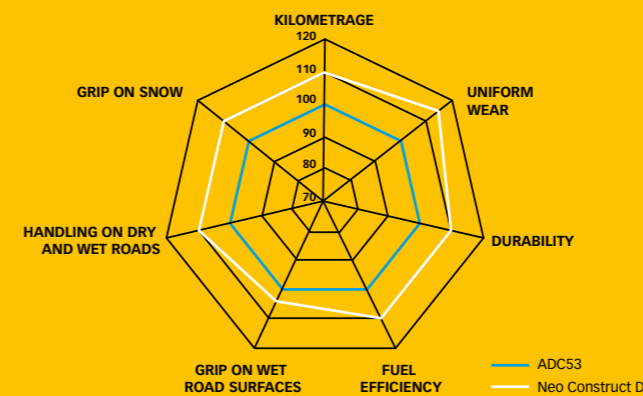

026

027

Size	L/S Index	TL/TT	M+S			DB	Class	Available
13R22.5	156/151K (154/152L)	TL	M+S		D C	73	A	Immediately
315/80R22.5	158/150K (154/150L)	TL	M+S		C B	73	A	Immediately
385/65R22.5	164K (158L)	TL	M+S					2023
425/65R22.5	165K	TL	M+S					2023
445/65R22.5	169 K	TL	M+S					2023
325/95R24	162/160K	TL	M+S		C C	73	A	Immediately

Size	L/S Index	TL/TT	M+S			DB	Class	Available
13R22.5	156/150K (154/151L)	TL	M+S		D C	74	B	Immediately
315/80R22.5	156/150K (154/150M)	TL	M+S		D C	75	B	Immediately
325/95R24	162/160K	TL	M+S		C C	74	B	Immediately

NEO Construct in the spotlight:

Check out the NEO-series in at www.aeolus-tyres.com

Aeolus AE77

THE ULTIMATE AGRICULTURE TYRE

NO MATTER WHAT.

Robust, durable and reliable? Check. Highly suitable for use on off-road vehicles & crashtenders? Check. Heavy loads and high speeds? No problem.



Size	L/S Index	TRA Code	Rim	Dimensions		Load capacity (kg) 80 km/h	Tyre pressure (kPa) 80 km/h	Pattern depth (mm)	TL/TT
				Width	Diameter				
24R20.5	176F	E-7	18.00	600	1370	7100	590	21	TL
525/65R20.5	173F	E-7	16.00	520	1200	6500	800	21	TL
445/65R22.5	169F	E-7	14.00	443	1149	5800	800	21	TL

AEOLUS-TYRES.COM

Neo Serie - The Ultimate Truck Tyre

NEO Winter

NEO WINTER



NOT MEANT FOR THE FAINT HEARTED



AEOLUS


NO MATTER WHAT

029




NEO WINTER S

- Suitable for Euro 6 legislation (High Load)
- Extreme traction due to innovative pattern design
- Special shoulder design ensures comfort and grip when steering
- Special winter-oriented rubber compound for grip in all circumstances

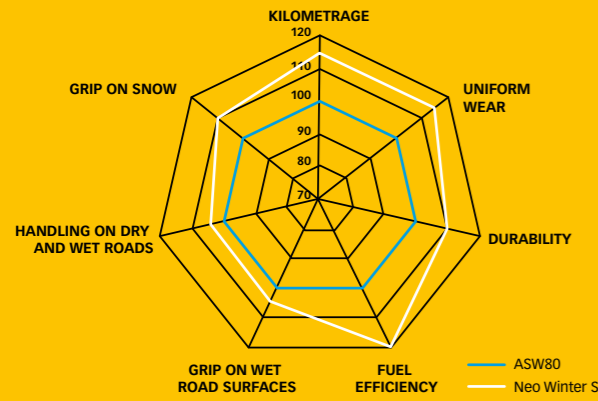

NEO WINTER D

- Drive axle tyre for winter conditions
- Perfect grip in snow, ice and wet conditions thanks to high-tech strip pattern (3D sipes)
- Extra belt layer (FRC) reinforces casing, improves re-profiling and enables re-profiling
- Lasting high traction thanks to special 3D pattern design
- Uniform wear thanks to reinforced shoulder design (RSR)
- Excellent life-span thanks to extra anti-wear layer in tread compound

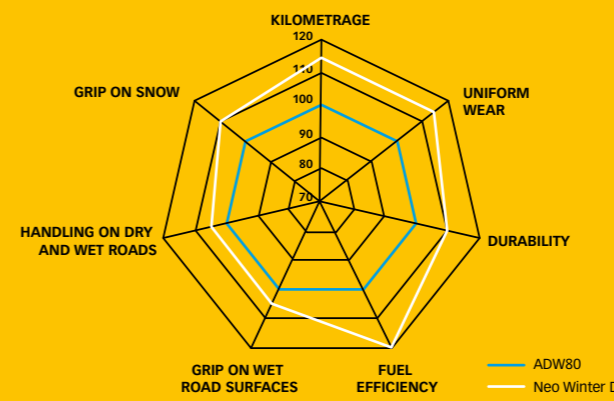

Size	L/S Index	TL/TT	M+S				DB	Class	Available
275/70R22.5	150/148J (152/148E)	TL	M+S		C	B	74	B	Immediately
295/80R22.5	154/149M	TL	M+S		C	C	74	B	Immediately
315/70R22.5	156/150L (154/150M)	TL	M+S		C	B	74	B	Immediately
315/80R22.5	158/150L (154/150M)	TL	M+S		C	C	74	B	Immediately
385/55R22.5	160K (158L)	TL	M+S		C	C	74	B	Immediately
385/65R22.5	164K (158L)	TL	M+S		C	C	73	B	Immediately

Size	L/S Index	TL/TT	M+S				DB	Class	Available
315/70R22.5	154/150L (152/148M)	TL	M+S		E	C	74	B	Immediately

NEO Winter in the spotlight: Check out the NEO-series in at www.aeolus-tyres.com

030

031

**THE HARDER YOU PUNISH ME
THE MORE YOU CONTROL ME
THE EASIER YOU LET ULTIMATE
DRIVING LOOK**

NO MATTER WHAT.

Neo Serie - The Ultimate Truck Tyre

NEO Urban

NEO URBAN

BRAKE. PULL. GO. THE CITY IS YOURS.



A159

AVAILABLE UP TO 33 INCH

AGC28

M+S

AEX1

MOBILE EXCAVATOR 10.00-20
DOUBLE ASSEMBLY

AEOLUS-TYRES.COM



The NEO Series are produced with European know-how and technology

AEOLUS


NO MATTER WHAT

033




NEO URBAN G

- Tyre specifically for city buses and urban transport
- Deeper pattern for extra high kilometrage
- Better driving behaviour due to pattern with 4 longitudinal grooves
- Excellent heat discharge thanks to S-shaped design and special deep sipe design
- Extra-strong side wall protection minimises damage caused by pavements
- Low rolling resistance offers high kilometrages due to special silicone additive in compound
- Full multi-layer structure makes casing extra strong

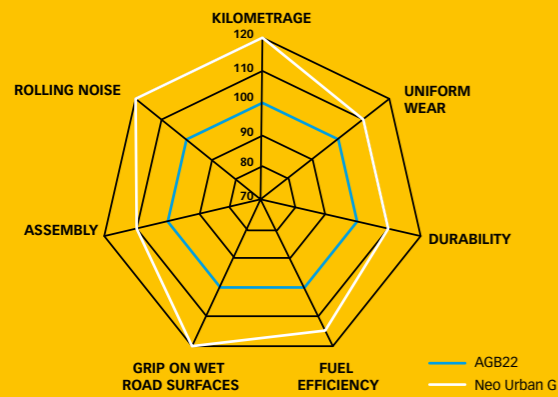

NEO URBAN D

- Specially developed drive axle tyre for city buses and urban transport
- Block pattern provides extra traction in tough conditions
- Reinforced sidewall minimizes damage from curbs
- Extra strong casing due to multi-layer construction

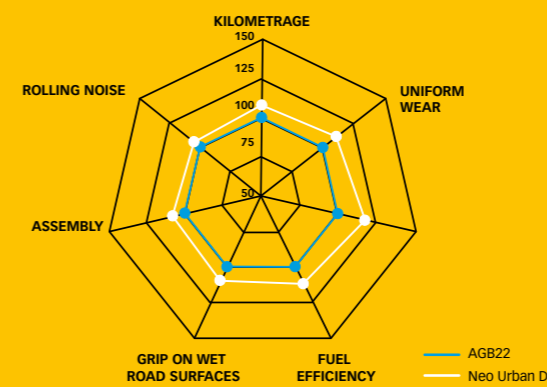

Size	L/S Index	TL/TT	M+S			DB	Class	Available
275/70R22.5	150/148J (152/148E)	TL	M+S		C B	73	B	Immediately
295/80R22.5	152/149J (154/150E)	TL	M+S		B B	72	B	Immediately
305/70R22.5	152/150L	TL	M+S		D C	72	B	Immediately

Size	L/S Index	TL/TT	M+S			DB	Class	Available
275/70R22.5	150/148J (152/148E)	TL	M+S		D C	73	A	Immediately



NEO ALLROADS S **NEO ALLROADS S+** **NEO FUEL S** **NEO FUEL S+** **NEO WINTER S**



ASL38 **ASL67** **ASR24** **ASR30** **ASR35**



ASR79 **HN257** **ASL06** **HN267**



SIZE AND PATTERN OVERVIEW STEERING AXLE

Size	Pattern	M+S		TL/TT	L/S index			DB	Class	EPREL
8.25R15	ASR30	M+S		TT SET	143/141G (141/140J)	D	B	73	B	EPREL
9.5R17.5	ASR24	M+S		TL	136/134M	D	B	73	B	EPREL
205/75R17.5	ASR35	M+S		TL	124/122M	D	C	71	1	
215/75R17.5	NEO ALLROADS S	M+S		TL	126/124M	D	C	72	B	EPREL
225/75R17.5	ASR35	M+S		TL	129/127M	E	C	73	B	EPREL
235/75R17.5	NEO ALLROADS S	M+S		TL	132/130M	D	C	72	B	EPREL
245/70R17.5	NEO ALLROADS S	M+S		TL	136/134M	D	C	72	B	EPREL
265/70R19.5	NEO ALLROADS S	M+S		TL	140/138M	C	B	72	B	EPREL
285/70R19.5	NEO ALLROADS S	M+S		TL	146/144L (145/143M)	C	C	72	B	EPREL
11R22.5	ASR79	M+S		TL	146/143M (148/145L)	D	C	71	A	EPREL
12R22.5	ASR79 II	M+S		TL	152/149M	D	D	74	2	
255/70R22.5	ASR79	M+S		TL	140/137M (140/140L)	D	C	72	B	EPREL
275/70R22.5	ASR30	M+S		TL	148/145M	D	C	71	A	EPREL
275/70R22.5	NEO WINTER S	M+S		TL	150/148J (152/148E)	C	B	74	B	EPREL
275/80R22.5	ASL67	M+S		TL	149/146L (148/145M)	D	C	76	C	
295/60R22.5	ASR79	M+S		TL	149/146L (150/147K)	D	C	72	B	EPREL
295/60R22.5	NEO FUEL S	M+S		TL	150/147K (149/146L)	D	C	72	B	EPREL
295/80R22.5	NEO ALLROADS S	M+S		TL	154/149M	D	C	72	B	EPREL
295/80R22.5	NEO FUEL S	M+S		TL	154/149M	B	B	72	2	
295/80R22.5	NEO WINTER S	M+S		TL	154/149M	C	C	74	B	EPREL
315/60R22.5	NEO FUEL S+	M+S		TL	154/148L	B	C	73	B	EPREL
315/70R22.5	NEO ALLROADS S	M+S		TL	156/150L (152/148M)	B	B	73	B	EPREL
315/70R22.5	NEO FUEL S	M+S		TL	156/150L (154/150M)	B	B	72	B	EPREL
315/70R22.5	NEO WINTER S	M+S		TL	152/148M (154/150L)	C	B	74	B	EPREL
315/80R22.5	NEO ALLROADS S	M+S		TL	158/150L (154/150M)	B	C	73	B	EPREL
315/80R22.5	NEO FUEL S	M+S		TL	158/150L (154/150M)	B	C	71	A	EPREL
315/80R22.5	NEO WINTER S	M+S		TL	156/150L (154/150M)	C	C	74	B	EPREL
385/55R22.5	NEO ALLROADS S+	M+S		TL	160K (158L)	C	B	74	B	EPREL
385/55R22.5	NEO WINTER S	M+S		TL	158L (160K)	C	C	74	B	EPREL
385/65R22.5	NEO ALLROADS S+	M+S		TL	164K (158L)	B	A	73	B	EPREL
385/65R22.5	NEO WINTER S	M+S		TL	164K (158L)	C	C	73	B	EPREL
11R24.5	HN257			TL	148/144M	D	C	73	2	
305/75R24.5	ASL38			TL	152/148M					



NEO ALLROADS D



NEO ALLROADS D+



NEO CONSTRUCT D



NEO FUEL D



NEO FUEL D+



NEO URBAN D



NEO WINTER D



ADR05



ADR35



ADR55



HN366+



ADC52




ADC53



ADR26



ADW80



SIZE AND PATTERN OVERVIEW DRIVE AXLE

Size	Pattern	M+S		TL/TT	L/S index			DB	Class	EPREL
9.5R17.5	ADR35	M+S		TL	136/134M	E	D	73	A	EPREL
205/75R17.5	ADR35	M+S		TL	124/122M	F	C	73	1	
215/75R17.5	NEO ALLROADS D	M+S		TL	126/124M	D	C	74	B	EPREL
225/75R17.5	ADR35	M+S		TL	129/127M	E	C	73	1	
235/75R17.5	NEO ALLROADS D	M+S		TL	132/130M	D	C	74	B	EPREL
245/70R17.5	NEO ALLROADS D	M+S		TL	136/134M	D	C	73	B	EPREL
265/70R19.5	NEO ALLROADS D	M+S		TL	140/138M	D	C	74	B	EPREL
285/70R19.5	NEO ALLROADS D	M+S		TL	146/144L (145/143M)	C	B	74	B	EPREL
11.00R20	ADC53	M+S		TT SET	152/149K	D	B	75	B	EPREL
12.00R20	ADC53	M+S		TT SET	154/151K	E	B	75	B	EPREL
10R22.5	ADR55	M+S		TL	144/142M	D	C	73	A	EPREL
11R22.5	ADC53	M+S		TL	146/143L (148/145K)	E	C	73	A	EPREL
12R22.5	ADC53	M+S		TL	152/149L	D	C	74	B	EPREL
12R22.5	ADR55	M+S		TL	152/149M	D	C	74	B	EPREL
13R22.5	ADC52	M+S		TL	154/151G (156/150F)	D	B	73	A	EPREL
13R22.5	NEO CONSTRUCT D	M+S		TL	156/150K (154/151L)	D	C	74	B	EPREL
255/70R22.5	ADR55	M+S		TL	140/137M (140/140L)	D	C	73	1	
275/70R22.5	ADR55	M+S		TL	148/145M	D	C	74	B	EPREL
275/70R22.5	NEO URBAN D	M+S		TL	148/145J	D	C	73	A	EPREL
275/80R22.5	ADR26	M+S		TL	149/146L (148/145M)	D	C	76	3	
295/60R22.5	NEO ALLROADS D+	M+S		TL	150/147K (149/146L)	D	B	75	B	EPREL
295/60R22.5	NEO FUEL D	M+S		TL	150/147K (149/146L)	D	C	72	A	EPREL
295/80R22.5	ADC53	M+S		TL	152/149L	D	B	75	B	EPREL
295/80R22.5	NEO ALLROADS D+	M+S		TL	152/148M	E	B	74	B	EPREL
295/80R22.5	NEO FUEL D	M+S		TL	152/149M	B	C	73	A	
315/60R22.5	NEO ALLROADS D+	M+S		TL	152/148L	D	C	73	B	EPREL
315/60R22.5	NEO FUEL D+	M+S		TL	152/148L	C	C	73	B	EPREL
315/70R22.5	NEO ALLROADS D+	M+S		TL	152/148M (154/150L)	C	C	76	B	EPREL
315/70R22.5	NEO FUEL D	M+S		TL	154/150L (152/148M)	C	C	73	A	EPREL
315/70R22.5	NEO WINTER D	M+S		TL	154/150L (152/148M)	E	C	74	B	EPREL
315/80R22.5	ADC52	M+S		TL	156/150K	D	B	73	A	EPREL
315/80R22.5	ADC53	M+S		TL	154/151M (156/150L)	D	B	74	B	EPREL
315/80R22.5	ADW80	M+S		TL	154/151M (156/150L)	E	C	74	B	EPREL
315/80R22.5	NEO ALLROADS D+	M+S		TL	156/150L (154/150M)	D	B	75	B	EPREL
315/80R22.5	NEO CONSTRUCT D	M+S		TL	156/150K (154/150M)	D	C	75	B	EPREL
315/80R22.5	NEO FUEL D	M+S		TL	156/150L (154/150M)	C	C	73	A	EPREL
325/95R24	NEO CONSTRUCT D	M+S		TL	162/160K	C	C	74	B	EPREL



**NEO
ALLROADS T2**




**NEO
ALLROADS T2**



**NEO
FUEL T+**




ATR65



SIZE AND PATTERN OVERVIEW TRAILER

Size	Pattern	M+S		TL/TT	L/S index			DB	Class	EPREL
215/75R17.5	NEO ALLROADS T2	M+S		TL	135/133J	C	C	73	B	EPREL
235/75R17.5	NEO ALLROADS T2	M+S		TL	143/141J (144F)	C	C	73	B	EPREL
245/70R17.5	NEO ALLROADS T2	M+S		TL	143/141J (146F)	C	B	73	B	EPREL
245/70R19.5	ASR79	M+S		TL	144/142j	E	C	72	B	EPREL
265/70R19.5	NEO ALLROADS T2	M+S		TL	143/141J (146F)	C	C	72	B	EPREL
285/70R19.5	NEO ALLROADS T2	M+S		TL	150/148J	C	C	72	B	EPREL
385/55R19.5	ATR65	M+S		TL	156J	C	B	73	B	EPREL
435/50R19.5	NEO FUEL T+	M+S		TL	160J	C	C	73	B	EPREL
385/55R22.5	NEO ALLROADS T2	M+S		TL	160K (158L)	C	C	74	B	EPREL
385/65R22.5	NEO ALLROADS T2	M+S		TL	164K (158L)	B	B	73	B	EPREL
425/65R22.5	NEO ALLROADS T2	M+S		TL	165K	C	C	73	B	EPREL
445/65R22.5	NEO ALLROADS T2	M+S		TL	169K	C	B	74	B	EPREL



**NEO
CONSTRUCT G**



**NEO
URBAN G**



AGC08



AGC28



AGB23




AGM10



ASR30




HN230+




SIZE AND PATTERN OVERVIEW ALL POSITIONS

Size	Pattern	M+S		TL/TT	L/S index			DB	Class	EPREL
7.50R16	AGC08	M+S		TT SET	122/118M	E	B	73	B	EPREL
8.25R16	AGC08	M+S		TT SET	126/122L	D	C	72	B	EPREL
8.25R20	AGC08	M+S		TT SET	136/134K	D	B	73	B	EPREL
9.00R20	AGC08	M+S		TT SET	144/142K	D	B	74	B	EPREL
10.00R15	HN230+	M+S		TT SET	148/145G (146/144J)	C	C	73	2	
10.00R20	AGC08	M+S		TT SET	146/143K	C	B	74	B	EPREL
10R22.5	AGC08	M+S		TL	144/142L	D	C	71	A	EPREL
11.00R20	AGC08	M+S		TT SET	152/149K	C	B	74	B	EPREL
11R22.5	AGB23	M+S		TL	146/143L (151/148E)	D	B	72	B	EPREL
11R22.5	AGC08	M+S		TL	146/143L (148/145K)	D	B	74	B	EPREL
12.00R20	AGC08	M+S		TT SET	154/151K	C	B	74	B	EPREL
12.00R24	AGC08	M+S		TT SET	160/157K	C	B	74	B	EPREL
12R22.5	AGC08	M+S		TL	152/149L	D	B	74	B	EPREL
13R22.5	AGM10	M+S		TL	154/151K (156/150G)					
13R22.5	NEO CONSTRUCT G	M+S		TL	156/151K (154/152L)	D	C	73	A	EPREL
215/75R17.5	AGC28	M+S		TL	135/133J	E	C	73	B	EPREL
235/75R17.5	AGC28	M+S		TL	143/141J (144/144F)	E	B	74	B	EPREL
245/70R17.5	AGC28	M+S		TL	143/141J (144/144F)	E	B	74	B	EPREL
265/70R19.5	AGB23	M+S		TL	143/141J	D	C	72	B	EPREL
265/70R19.5	AGC28	M+S		TL	143/141J	E	B	74	B	
275/70R22.5	AGC28	M+S		TL	148/145M	D	B	74	B	EPREL
275/70R22.5	NEO URBAN G	M+S		TL	150/148J (152/148E)	C	B	73	B	EPREL
295/80R22.5	NEO URBAN G	M+S		TL	154/149M	B	B	72	B	EPREL
305/70R22.5	NEO URBAN G	M+S		TL	152/150L	D	C	72	B	EPREL
315/80R22.5	NEO CONSTRUCT G	M+S		TL	158/150K	C	B	73	A	EPREL
325/95R24	NEO CONSTRUCT G	M+S		TL	162/160K	C	C	73	A	EPREL
385/55R22.5	AGC28	M+S		TL	160K (158L)	D	B	74	B	EPREL
385/65R22.5	AGC28	M+S		TL	164K (158L)	C	C	74	B	EPREL
425/65R22.5	AGC28	M+S		TL	165K	C	C	74	B	EPREL
445/65R22.5	AGC28	M+S		TL	169K	C	C	74	B	EPREL

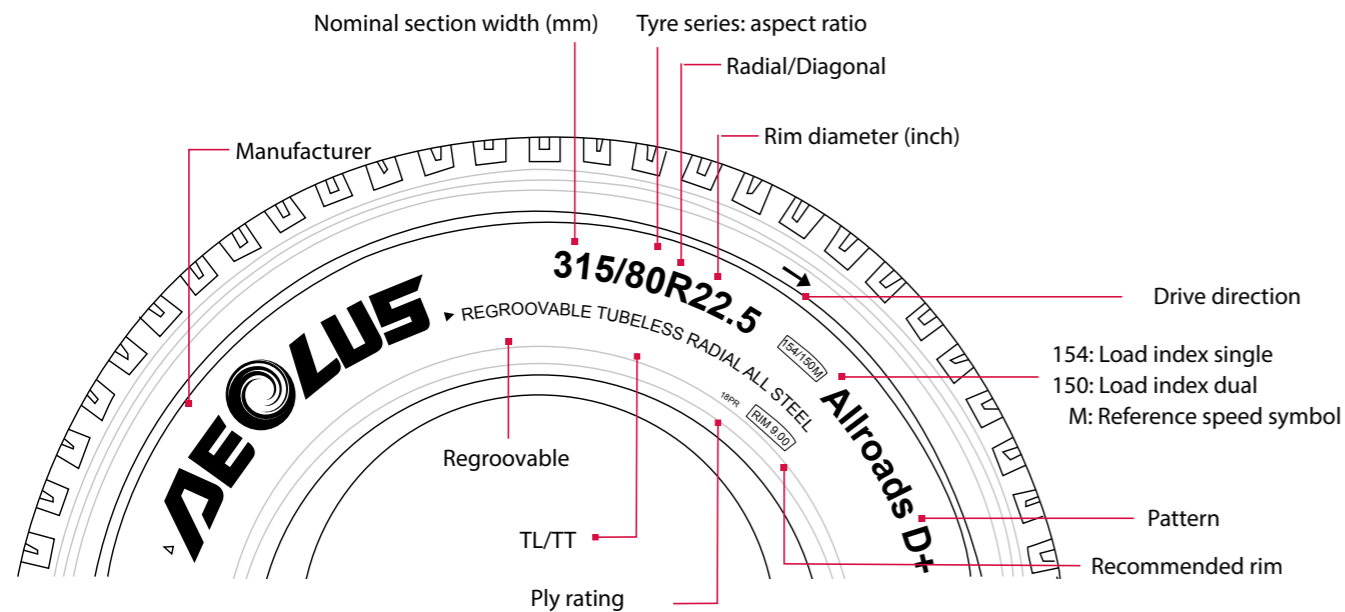

TECHNICAL SPECIFICATIONS

- A** External diameter
- B** Width
- H** Loaded radius
- F** Rim diameter
- Q** Cross section
- Z** Minimum distance, twin tyres

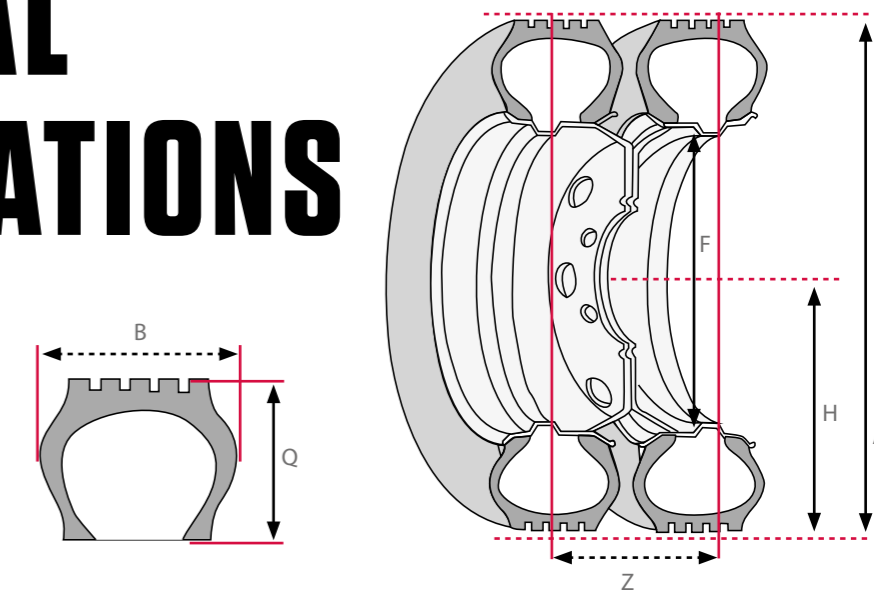

LOAD INDEX

Loadindex	Loading capacity in kg
120	1400
121	1450
122	1500
123	1550
124	1600
125	1650
126	1700
127	1750
128	1800
129	1850
130	1900
131	1950
132	2000
133	2060
134	2120
135	2180
136	2240
137	2300
138	2360
139	2430
140	2500
141	2575
142	2650
143	2725
144	2800
145	2900
146	3000
147	3075
148	3150
149	3250
150	3350
151	3450
152	3550
153	3650
154	3750

SPEED INDEX

Speed symbol	Speed in km
F	80
G	90
J	100
K	110
L	120
M	130
N	140

DEVIATIONS IN LOAD CAPACITY DEPENDING ON SPEED

The data shown directly below in the table on this page correspond to the international ETRTO standard and are intended only to provide information for the reader.

Always contact us by telephone or e-mail in special cases – in the case of cargoes which exceed explicit load limits as indicated on the side wall of the tyre in question or as specified in the instructions in this catalogue. In all cases in which the necessary air pressure in the tyres has to be increased to more than 10 bar on the basis of the data supplied here: Reduce the weight of your intended cargo until you are able to drive with a maximum pressure of 10 bar. If despite

this there is still a need to drive with a pressure in excess of 10 bar, as well as carrying out the basically essential check with us, you will also need to check the specified limits of the applicable rim manufacturer, as well as expressly following the regulations for fitment and use of both the components in question (tyres and wheels).



















In addition, the following tyre loading capacities are applicable in special cases: Buses and coaches (M3 class 1): + 15% loading capacity if the average speed is below 40 km/h. Buses and coaches (M3 class 2): + 10% loading capacity if the average speed remains below 60 km/h.

Speed (km/h) Speed Symbol	Speed in km						Pressure compensation (%)
	F	G	J	K	L	M	
0	+150	+150	+150	+150	+150	+150	40
5	+110	+110	+110	+110	+110	+110	40
10	+80	+80	+80	+80	+80	+80	30
15	+65	+65	+65	+65	+65	+65	25
20	+50	+50	+50	+50	+50	+50	21
25	+35	+35	+35	+35	+35	+35	17
30	+25	+25	+25	+25	+25	+25	13
35	+19	+19	+19	+19	+19	+19	11
40	+15	+15	+15	+15	+15	+15	10
45	+13	+13	+13	+13	+13	+13	9
50	+12	+12	+12	+12	+12	+12	8
55	+11	+11	+11	+11	+11	+11	7
60	+10	+10	+10	+10	+10	+10	6
65	+7.5	+8.5	+8.5	+8.5	+8.5	+8.5	4
70	+5.0	+7.0	+7.0	+7.0	+7.0	+7.0	2
75	+2.5	+5.5	+5.5	+5.5	+5.5	+5.5	1
80	(0)	4.0	+4.0	+4.0	+4.0	+4.0	0
85		2.0	+3.0	+3.0	+3.0	+3.0	0
90		(0)	+2.0	+2.0	+2.0	+2.0	0
95			+1.0	+1.0	+1.0	+1.0	0
100			(0)	0	0	0	0
110				(0)	0	0	0
120					(0)	0	0
130						(0)	0

Size	Pattern	L/S-index	L/S-index 2	PR	TL/TT	M+S	Tread icon	Width (mm)	Overall diameter (mm)	Loaded radius (mm)	Rolling circ. (mm)	Tread depth (mm)	Recommended wheel	Permitted wheel	Bearing capacity per tyre 1		Bearing capacity per tyre 2		Tyre pressure (bar)	Weight (kg)	Rolling resistance	Grip on wet surface	Noise Emission (dB)	Noise Emission (Class)	Vehicle class
															Single	Dual	Single	Dual							
10.00R15	HN230+	148/145G	146/144J	18	TT SET	M+S	▲	279	923	410	2815	13,5	7.5 - 15	7.0, 8.0 - 15	3150 - 90	2900 - 90	3000 - 100	2800 - 100	8.5	48,55	C	C	73	2	CAT-3
10.00R20	AGC08	146/143K		16	TT SET	M+S	▲	274	1054	0	3215	16,5	7.50 - 20	7.50V - 20, 8.0 - 20	3000 - 110	2725 - 110			8.3	60,54	C	B	74	B	CAT-3
10R22.5	ADR55	144/142M		16	TL	M+S	▲	258	1025	476	3126	15,5	7.50 - 22.5	6.75 - 22.5	2800 - 130	2650 - 130			9.0	48,13	D	C	73	A	CAT-3
10R22.5	AGC08	144/142L		16	TL	M+S	▲	252	1022	0	3117	15,5	7.5 - 22.5	6.75 - 22.5	2800 - 120	2650 - 120			9.0	48,51	D	C	71	A	CAT-3
10R22.5	ASR65	144/142M		16	TL	M+S	▲	248	1020	0	3111	14,5	7.5 - 22.5	6.75 - 22.5	2800 - 130	2650 - 130			9.0	47,30	D	C	73	A	CAT-3
11.00R20	ADC53	152/149K		18	TT SET	M+S	▲	287	1091	0	3328	18,5	8.00 - 20	8.00V 8.5 - 20	3550 - 110	3250 - 110			9,3	73,56	D	B	75	B	CAT-3
11.00R20	AGC08	150/147K		18	TT SET	M+S	▲	287	1087	0	3315	17	8.00 - 20	8.00V 8.5 - 20	3350 - 110	3075 - 110			8.3	62,37	C	B	74	B	CAT-3
11R22.5	ADC53	146/143L	148/145K	16	TL	M+S	▲	281	1066	491	3348	22,5	8.25 - 22.5	7.50 - 22.5	3000 - 120	2725 - 120	3150 - 110	2900 - 110	8.3	62,52	E	C	73	A	CAT-3
11R22.5	AGB23	146/143L	151/148E	16	TL	M+S	▲	278	1062	0	3239	20	8.25 - 22.5	7.50 - 22.5	3000 - 100	2725 - 100	3450 - 70	3150 - 70	8,3	63,07	D	B	72	B	CAT-3
11R22.5	AGC08	146/143L	148/145K	16	TL	M+S	▲	281	1054	0	3215	17	8.25 - 22.5	7.50 - 22.5	3000 - 120	2725 - 120	3150 - 110	2900 - 110	8.3	56,62	D	B	74	B	CAT-3
11R22.5	ASR79	146/143M	148/145L	16	TL	M+S	▲	280	1051	0	3206	15	8.25 - 22.5	7.50 - 22.5	3000 - 130	2725 - 130	3150 - 110	2900 - 110	8,3	54,10	D	C	71	A	CAT-3
11R24.5	HN257	148/144M		16	TL		▲	290	1096	506	3342	15	8.25 - 24.5	0	3150 - 130	2650 - 130			8.3	58,00	D	C	73	2	CAT-3
12.00R20	ADC53	154/151K		18	TT SET	M+S	▲	310	1130	518	3422	20,6	8.5 - 20	8.50V 9.0 - 20	3750 - 110	3450 - 110			8.3	82,16	E	B	75	B	CAT-3
12.00R20	AGC08	154/151K		18	TT SET	M+S	▲	310	1123	0	3425	17,5	8.50 - 20	8.50V 9.0 - 20	3750 - 110	3450 - 110			8.3	80,47	C	B	74	B	CAT-3
12.00R24	AGC08	160/157K		20	TT SET	M+S	▲	315	1223	0	3730	17,5	8.50 - 24	8.50V 9.0 - 20	4500 - 110	4125 - 110			9	80,01	C	B	74	B	CAT-3
12R22.5	ADC53	152/149L		18	TL	M+S	▲	300	1081	507	3282	19,5	9.00 - 22.5	8.25 - 22.5	3550 - 120	3250 - 120			9.3	66,54	D	C	74	B	CAT-3
12R22.5	AGC08	152/149L		18	TL	M+S	▲	303	1076	0	3282	17	9.00 - 22.5	8.25 - 22.5	3550 - 120	3250 - 120			9.3	65,01	D	B	74	B	CAT-3
12R22.5	ADR55	152/149M		18	TL	M+S	▲	300	1090	0	3324,5	23	9.00 - 22.5	8.25 - 22.5	3550 - 130	3250 - 130			9.3	63,21	D	C	74	B	CAT-3
12R22.5	ASR79 II	152/149M		18	TL	M+S	▲	305	1086	0	3312,3	17	9.00 - 22.5	8.25 - 22.5	3550 - 130	3250 - 130			9.3	66,33	D	D	74	2	CAT-3
13R22.5	ADC52	154/151G	156/150F	18	TL	M+S	▲	317	1141	0	3480	24	9.00 - 22.5	9.75 - 22.5	3750 - 110	3450 - 110	4000 - 90	3350 - 90	8,3	76,04	D	B	73	A	CAT-3
13R22.5	AGM10	154/151K	156/150G	18	TL	M+S	▲	314	1137	0	3468	22,5	9.00 - 22.5	9.75 - 22.5	3750 - 90	3450 - 90	4000 - 80	3350 - 80	8,3	75,04					CAT-3
13R22.5	NEO CONSTRUCT D	156/150K	154/151L	18	TL	M+S	▲	306	1130	0	3447	22	9.00 - 22.5	0	4000 - 110	3750 - 90	3350 - 110	4000 - 80	8.75	76,52	D	C	74	B	CAT-3
13R22.5	NEO CONSTRUCT G	156/151K	154/152L	18	TL	M+S	▲	318	1125	0	3431	18	9.75 - 22.5	0	4000 - 110	3250 - 110	3750 - 130	3350 - 130	8.75	71,81	D	C	73	A	CAT-3
205/75R17.5	ADR35	124/122M		14	TL	M+S	▲	205	760	351	2384	16	6.00 - 17.5	5.25 - 17.5, 6.75 - 17.5	1600 - 130	1500 - 130			7.6	27,89	F	C	73	1	CAT-3
205/75R17.5	ASR35	124/122M		14	TL	M+S	▲	208	754	351	2294	13	6.00 - 17.5	5.25 - 17.5, 6.75 - 17.5	1600 - 130	1500 - 130			7.6	27,46	D	C	71	1	CAT-3
215/75R17.5	AGC28	135/133J		18	TL	M+S	▲	218	766	347	2327	15,5	6.00 - 17.5	6.75 - 17.5	2180 - 100	2060 - 100			8.3	29,36	E	C	73	B	CAT-3
215/75R17.5	NEO ALLROADS D	126/124M		16	TL	M+S	▲	213	768	0	2342	15	6.0 - 17.5	6.75 - 17.5	1700 - 130	1600 - 130			7.0	28,89	D	C	74	B	CAT-3
215/75R17.5	NEO ALLROADS S	126/124M		16	TL	M+S	▲	218	761	0	2321	12,5	6.00 - 17.5	0	1700 - 130	1600 - 130			7.0	28,20	D	C	72	B	CAT-3
215/75R17.5	NEO ALLROADS T2	135/133J		18	TL	M+S	▲	235	795	0	2425	12,5	6.00 - 17.5	0	2180 - 100	2060 - 100			8.5	28,80	C	C	73	B	CAT-3
225/75R17.5	ADR35	129/127M		16	TL	M+S	▲	222	784	368	2391	17	6.75 - 17.5	7.50 - 17.5	1850 - 130	1750 - 130			8.3	30,29	E	C	73	1	CAT-3
225/75R17.5	ASR35	129/127M		16	TL	M+S	▲	224	779	368	2391	13	6.75 - 17.5	7.50 - 17.5	1850 - 130	1750 - 130			8.3	29,85	E	C	73	B	CAT-3
235/75R17.5	AGC28	143/141J	144/144F	18	TL	M+S	▲	236	804	370	2440	16,5	6.75 - 17.5	7.50 - 17.5	2725 - 100	2575 - 100	2800 - 80	2800 - 80	9.0	32,68	E	B	74	B	CAT-3
235/75R17.5	NEO ALLROADS D	132/130M		16	TL	M+S	▲	233	801	0	2443	16	6.75 - 17.5	7.50 - 17.5	2000 - 130	1900 - 130			7.75	32,41	D	C	74	B	CAT-3
235/75R17.5	NEO ALLROADS S	132/130M		16	TL	M+S	▲	235	793	370	2419	13	6.75 - 17.5	7.50 - 17.5	2000 - 130	1900 - 130			8.3	30,49	D	C	72	B	CAT-3
235/75R17.5	NEO ALLROADS T2	143/141J	144F	18	TL	M+S	▲	235	795	0	2425	12,5	6.75 - 17.5	0	2725 - 100	2575 - 100	3000 - 80	2800 - 80	8.75	31,78	C	C	73	B	CAT-3
245/70R17.5	AGC28	143/141J	144/144F	18	TL	M+S	▲	252	793	356	2418	16,5	7.50 - 17.5	6.75 - 17.5	2725 - 100	2575 - 100	2800 - 80	2800 - 80	9.0	35,40	E	B	74	B	CAT-3
245/70R17.5	NEO ALLROADS S	136/134M		18	TL	M+S	▲	250	792	0	2366	15	6.75 - 17.5	7.50 - 17.5	2240 - 130	2120 - 130			8.5	34,36	D	C	72	B	CAT-3
245/70R17.5	NEO ALLROADS T2	143/141J	146F	18	TL	M+S	▲	254	782	0	2385	11	7.50 - 17.5	0	2725 - 100	2575 - 100	3000 - 80	3000 - 80	8.75	33,38	C	B	73	B	CAT-3
245/70R17.5	NEO ALLROADS D	136/134M		18	TL	M+S	▲	251	792	370	2416	15,5	7.50 - 17.5	6.75 - 17.5	2240 - 130	2120 - 130			8.5	34,98	D	C	73	B	CAT-3
245/70R19.5	ASR79	144/142J		18	TL	M+S	▲	245	853	0	2602	15	7.50 - 19.5	6.75 - 19.5	2800 - 100	2650 - 100			9.0	38,64	E	C	72	B	CAT-3
255/70R22.5	ADR55	140/137M	140/140L	16	TL	M+S	▲	254	936	0	2855	20	7.50 - 22.5	8.25 - 22.5	2500 - 130	2300 - 130	2500 - 120	2500 - 120	8,3	44,09	D	C	73	1	CAT-3
255/70R22.5	ASR79	140/137M	140/140L	16	TL	M+S	▲	250	928	435	2830	15	7.50 - 22.5	8.25 - 22.5	2500 - 130	2300 - 130	2500 - 120	2500 - 120	8.3	42,49	D	C	72	B	CAT-3
265/70R19.5	AGB23	143/141J		18	TL	M+S	▲	259	872	0	2660	16	7.5 - 19.5	8.25 - 19.5	2725 - 100	2575 - 100			8.3	40,33	D	C	72	B	CAT-3
265/70R19.5	AGC28	143/141J		18	TL	M+S	▲	258	877	400	2674	17,5	7.50 - 19.5	8.25 - 19.5	2725 - 100	2575 - 100			8.3	41,12	E	B	74	B	CAT-3
265/70R19.5	NEO ALLROADS D	140/138M		16	TL	M+S	▲	258	873	0	2663	16,5	7.5 - 19.5	8.25 - 19.5	2500 - 130	2360 - 130			8.3	40,20	D	C	74	B	CAT-3
265/70R19.5	NEO ALLROADS T2	143/141J	146F	18	TL	M+S	▲	258	868	0	2647	13	7.50 - 19.5	0	2725 - 100	2575 - 100	3000 - 80	3000 - 80	8.75	39,93	C	C	72	B	CAT-3
265/70R19.5	NEO ALLROADS S	140/138M		16	TL	M+S	▲	260	868	0	2647	13	7.50 - 19.5	8.25 - 19.5	2500 - 130	2360 - 130			8.3	39,90	C	B	72	B	CAT-3
275/70R22.5	ADR55	148/145M		18	TL	M+S	▲	274	975	0	2974	20	8.25 - 22.5	9.00 - 22.5	3150 - 130	2900 - 130			9	51,01	D	C	74	B	CAT-3

046

047

Size	Pattern	L/S-index	L/S-index 2	PR	TL/TT	M+S		Width (mm)	Overall diameter (mm)	Loaded radius (mm)	Rolling circ. (mm)	Tread depth (mm)	Recommended wheel	Permitted wheel	Bearing capacity per tyre 1		Bearing capacity per tyre 2		Tyre pressure (bar)	Weight (kg)	Rolling resistance	Grip on wet surface	Noise Emission (dB)	Noise Emission (Class)	Vehicle class
															Single	Dual	Single	Dual							
385/55R22.5	NEO WINTER S	158L	160K	20	TL	M+S		386	1004	461	3151	15,5	11.75 - 22.5	0	4500 - 110		4250 - 120		9.0	73,30	C	C	74	B	CAT-3
385/65R22.5	AGC28	164K	158L	20	TL	M+S		387	1070	0	3264	16,8	11.75 - 22.5	12.25 - 22.5	5000 - 110		4250 - 120		9.0	73,60	C	C	74	B	CAT-3
385/65R22.5	NEO ALLROADS S+	164K	158L	20	TL	M+S		382	1069	0	3260	15	11.75 - 22.5	0	5000 - 110		4250 - 120		9.0	74,49	B	A	73	B	CAT-3
385/65R22.5	NEO ALLROADS T2	164K	158L	20	TL	M+S		380	1077	498	3285	17	11.75 - 22.5	12.25 - 22.5	5000 - 110		4250 - 120		9.3	76,75	B	B	73	B	CAT-3
385/65R22.5	NEO WINTER S	164K	158L	20	TL	M+S		385	1064	0	3245	13,5	11.75 - 22.5	0	5000 - 110		4250 - 120		9.0	73,19	C	C	73	B	CAT-3
425/65R22.5	AGC28	165K		20	TL	M+S		422	1118	515	3387	16,5	13.00 - 22.5	12.25 - 22.5	5150 - 110				8.3	87,91	C	C	74	B	CAT-3
425/65R22.5	NEO ALLROADS T2	165K		20	TL	M+S		414	1119	0	3413	16,5	12.25 - 22.5	0	5150 - 110				8.25	85,96	C	C	73	B	CAT-3
435/50R19.5	NEO FUEL T+	160J		20	TL	M+S		429	922	427	8834	12	14.00 - 19.5	0	4500 - 100				9.0	65,08	C	C	73	B	CAT-3
445/65R22.5	AGC28	169K		20	TL	M+S		453	1147	526	3602	16,5	14.00 - 22.5	13.00 - 22.5	5800 - 110				8.3	94,45	C	C	74	B	CAT-3
445/65R22.5	NEO ALLROADS T2	169K		20	TL	M+S		440	1146	0	3495	16,5	13.00 - 22.5	0	5800 - 110				9.0	94,10	C	B	74	B	CAT-3
7.50R16	AGC08	122/118M		14	TT SET	M+S		214	807	0	2461	13	6.00 - 15	0	1500 - 130	1320 - 130			7,7	30,03	E	B	73	B	CAT-3
8.25R15	ASR30	143/141G	141/140J	18	TT SET	M+S		236	836	0	2550	13	6.50 - 15	6.00 - 15	2725 - 90	2575 - 90	2575 - 100	2500 - 100	8,5	33,68	D	B	73	B	CAT-3
8.25R16	AGC08	126/122L		14	TT SET	M+S		228	850	0	2593	13	6.50 - 16	6.00 - 16	1700 - 120	1500 - 120			6,7	34,02	D	C	72	B	CAT-3
8.25R20	AGC08	136/134K		14	TT SET	M+S		232	967	0	2949	14,5	6.50 - 20	6.50T - 20, 7.0 - 20	2240 - 110	2120 - 110			8.3	46,73	D	B	73	B	CAT-3
9.00R20	AGC08	144/142K		16	TT SET	M+S		256	1025	0	3126	15,5	7.00 - 20	7.00T 7.5 - 20	2800 - 110	2650 - 110			9.0	54,32	D	B	74	B	CAT-3
9.5R17.5	ADR35	136/134M		18	TL	M+S		234	851	0	2596	16	6.75 - 17.5	6.00 - 17.5	2240 - 130	2120 - 130			9.0	45,10	E	D	73	A	CAT-3
9.5R17.5	ASR24	136/134M		18	TL	M+S		230	844	0	2574	13	6.75 - 17.5	6.00 - 17.5	2240 - 130	2120 - 130			9.0	45,10	D	B	73	B	CAT-3


OUR TOTAL CONCEPT AT THE LOWEST TOTAL COST

Real costs are important to transport companies. This is something we fully realise. We thus try to minimise costs by developing top quality tyres that offer a long life-span, such as the Aeolus Life Cycle. Let's take our new Aeolus truck tyre as an example. When these tyres reach the end of their service life (in good condition), regrooving can be used to extend their life-span. Thanks to a high rubber percentage, tyre specialists can easily prolong use by cutting 3 mm deeper into the tyre. After regrooving, Aeolus Casing Management & high quality tread renewal are other important tools for extending life-span and reducing costs.

Regrooving

Regrooving is possible on Aeolus tyres which, in accordance with ECE regulation 54, feature the word 'REGROOVABLE' on both side walls. In addition, they must, in accordance with §36 Erläuterung 6 StVZO 4.2 (German road authorisation), have a remaining pattern depth of at least 2 mm. We recommend regrooving when the remaining pattern depth is 3 mm. Irregular wear and blocking points must also be taken into account when doing so. The tyres can only be regrooved by a qualified specialist, so the option of tread renewal is not put at risk.


NEO ALLROADS S

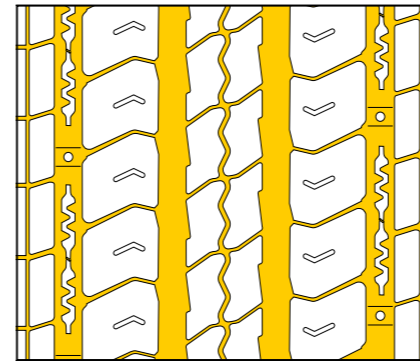

B A A B

Size	Depth (mm)	Width (mm)
205/75R17.5	A:3;B:2	7-8
215/75R17.5	A:2.5;B:2	7-8
225/75R17.5	A:3;B:2	7-8
235/75R17.5	A:3;B:2	7-8
245/70R17.5	A:3;B:2	7-8
265/70R19.5	A:3;B:2	7-8
295/60R22.5	A:3-3.5;B:2-2.5	10-12
295/80R22.5	A:3-3.5;B:2-2.5	10-12
315/70R22.5	A:3-3.5;B:2-2.5	10-12
315/80R22.5	A:3-3.5;B:2-2.5	10-12


NEO ALLROADS S+

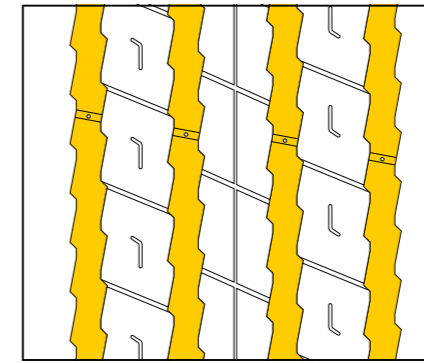

B A A B

Size	Depth (mm)	Width (mm)
385/55R22.5	A:3-3.5;B:2-2.5	A:10-12;B:5-7
385/65R22.5	A:3-3.5;B:2-2.5	A:10-12;B:5-7


NEO ALLROADS D

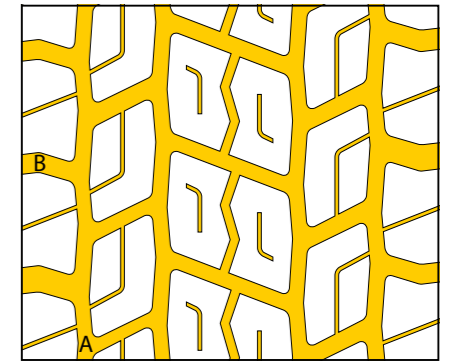

B A

Size	Depth (mm)	Width (mm)
205/75R17.5	2-2.5	A:7-8;B:5-8
215/75R17.5	2	A:7-8;B:5-7
225/75R17.5	2-2.5	A:7-8;B:5-7
235/75R17.5	2-2.5	A:7-8;B:5-7
245/70R17.5	2-2.5	A:9-11;B:5-7
265/70R19.5	2-2.5	A:7-9;B:3-5
285/70R19.5	2-2.5	A:7-9;B:3-5


NEO CONSTRUCT G

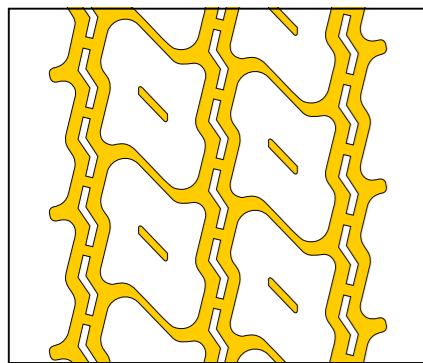

A B A

Size	Depth (mm)	Width (mm)
13R22.5	A:3-3.5;B:2-2.5	10-12
315/80R22.5	A:3-3.5;B:2-2.5	10-12
385/65R22.5	A:3-3.5;B:2-2.5	10-12
425/65R22.5	A:3-3.5;B:2-2.5	10-12
445/65R22.5	A:3-3.5;B:2-2.5	10-12
325/95R24	A:3-3.5;B:2-2.5	10-12


NEO CONSTRUCT D

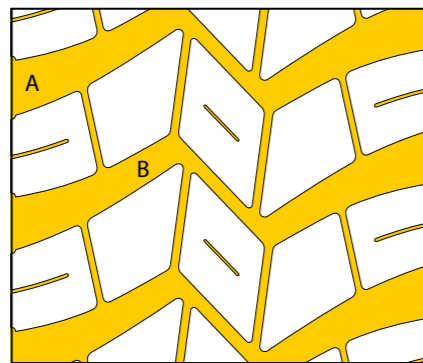

A B

Size	Depth (mm)	Width (mm)
13R22.5	2.5	A:10-12;B:5-7
315/80R22.5	2-2.5	A:10-12;B:5-7
325/95R24	2-2.5	A:10-12;B:5-7


NEO FUEL S

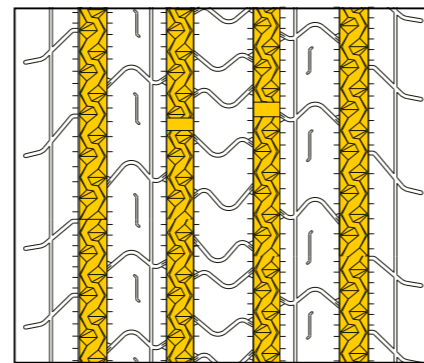

B A A B


Maat	Diepte (mm)	Breedte (mm)
295/60R22.5	A:2.5;B:2	5-6
295/80R22.5	A:3-3.5;B:2-2.5	5-6
315/60R22.5	A:3-3.5;B:2-2.5	5-6
315/70R22.5	A:3-3.5;B:2-2.5	5-6
315/80R22.5	A:3-3.5;B:2-2.5	5-6

NEO ALLROADS D+

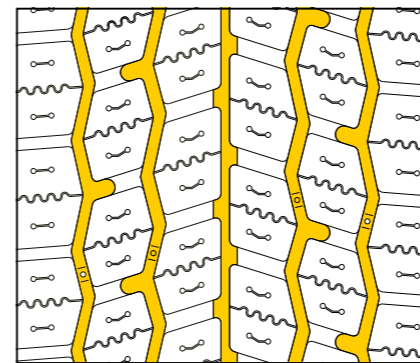

Size	Depth (mm)	Width (mm)
295/60R22.5	2-2.5	5-7
295/80R22.5	2-2.5	5-7
315/60R22.5	2-2.5	5-7
315/70R22.5	2-2.5	5-7
315/80R22.5	2-2.5	5-7


NEO ALLROADS T2

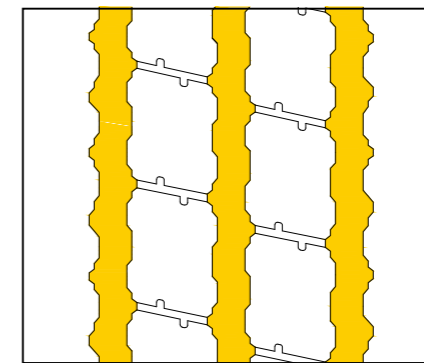

B A B

Size	Depth (mm)	Width (mm)
205/65R17.5	A:2.5;B:2	7-8
215/75R17.5	A:2.5;B:2	7-8
235/75R17.5	A:3;B:2	7-8
245/70R17.5	A:3;B:2	7-8
265/70R17.5	A:3;B:2	7-8


NEO ALLROADS T2

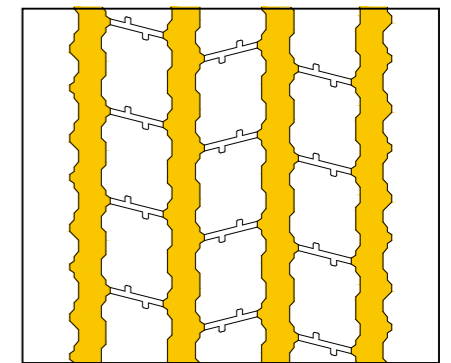

B A A B


Size	Depth (mm)	Width (mm)
285/70R19.5	A:3;B:2	7-9
385/55R19.5	A:3-3.5;B:2-2.6	7-8
385/65R22.5	A:3-3.5;B:2-2.5	7-8
425/65R22.5	A:3-3.5;B:2-2.6	7-8
445/65R22.5	A:3-3.5;B:2-2.5	7-8

NEO FUEL D

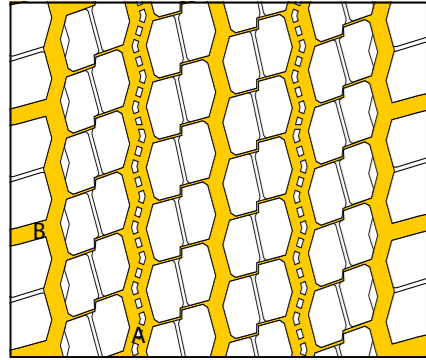


Maat	Diepte (mm)	Breedte (mm)
295/60R22.5	A:2.5-3;B:2-2.5	A:10-12;B:5-7
295/80R22.5	A:3-3.5;B:2-2.5	A:10-12;B:5-7
315/60R22.5	A:3-3.5;B:2-2.5	A:10-12;B:5-7
315/70R22.5	A:3-3.5;B:2-2.5	A:10-12;B:5-7
315/80R22.5	A:3-3.5;B:2-2.5	A:10-12;B:5-7

NEO FUEL D+

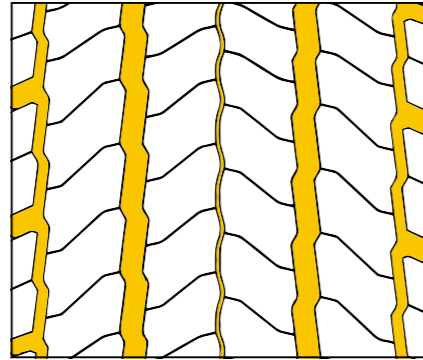

Maat	Diepte (mm)	Breedte (mm)
295/80R22.5	A:3-3.5;B:3-3.5	B:10-10.5
315/60R22.5	A:3-3.5;B:3-3.5	B:12-12.5


NEO FUEL T+

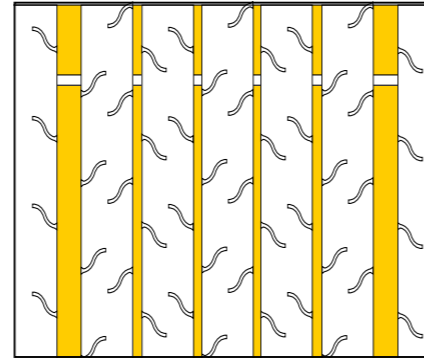

B A A A A B

Size	Depth (mm)	Width (mm)
385/55R19.5	A:3, B:3	A: 3, B:7-8
435/50R19.5	A:3, B:3	A: 3, B:7-8
445/45R19.5	A:3, B:3	A: 3, B:7-8
385/65R22.5	A:3, B:3	A: 3, B:7-8


NEO URBAN G

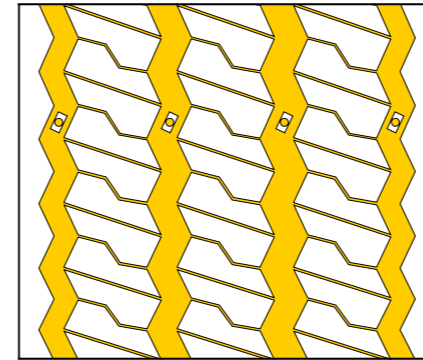

B A A B

Size	Depth (mm)	Width (mm)
11R22.5	A:4 B:3	7-8
275/70R22.5	A:4 B:3	7-8
295/80R22.5	A:4 B:3	7-8


ASR69

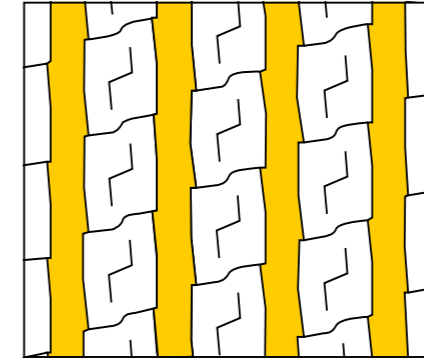

B A A B

Size	Depth (mm)	Width (mm)
295/80R22.5	A:3-3.5;B:2-2.5	10-12
315/70R22.5	A:3-3.5;B:2-2.5	10-12
315/80R22.5	A:3-3.5;B:2-2.5	10-12


ADR69

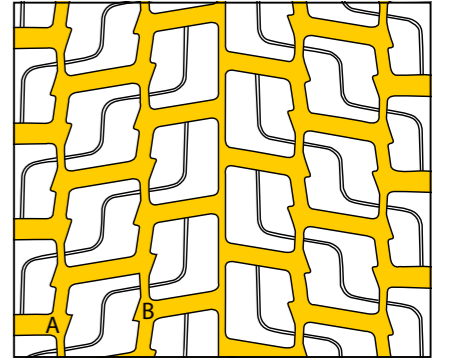

A B

Size	Depth (mm)	Width (mm)
295/80R22.5	2-2.5	A:10-12;B:5-7
315/70R22.5	2-2.5	A:10-12;B:5-7
315/80R22.5	2-2.5	A:10-12;B:5-7


NEO WINTER S

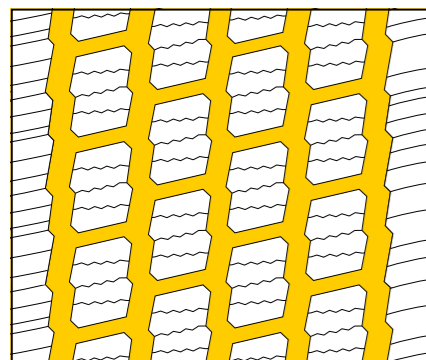

B A A A B


Size	Depth (mm)	Width (mm)
295/60R22.5	A:3-3.5;B:2-2.5	10-12
295/80R22.5	A:3-3.5;B:2-2.5	10-12
315/60R22.5	A:3-3.5;B:2-2.5	10-12
315/70R22.5	A:3-3.5;B:2-2.5	10-12
315/80R22.5	A:3-3.5;B:2-2.5	10-12
385/55R22.5	A:3-3.5;B:2-2.5	10-12
385/65R22.5	A:3-3.5;B:2-2.5	10-12

NEO WINTER D

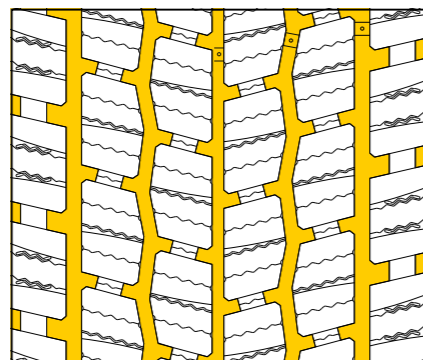

Size	Depth (mm)	Width (mm)
295/60R22.5	2-2.5	5-7
295/80R22.5	2-2.5	5-7
315/60R22.5	2-2.5	5-7
315/70R22.5	2-2.5	5-7
315/80R22.5	2-2.5	5-7


NEO URBAN D

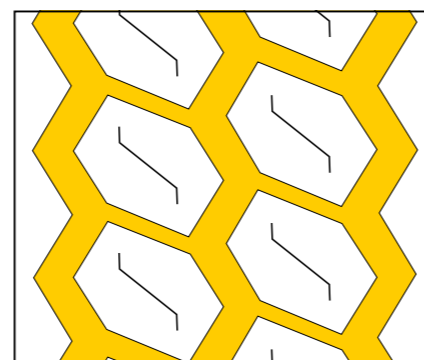

B A A B

Size	Depth (mm)	Width (mm)
275/70R22.5	2-2.5	13-15


ATR65

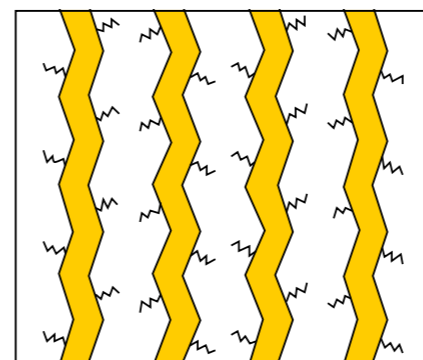

B A A B

Size	Depth (mm)	Width (mm)
245/70R17.5	A:2.5;B:2	7-9
285/70R19.5	A:3;B:2	7-9
265/70R19.5	A:3;B:2	7-9
385/55R22.5	A:3-3.5;B:2-2.6	7-9
385/65R22.5	A:3-3.5;B:2-2.5	7-9
425/65R22.5	A:3-3.5;B:2-2.6	7-9
445/65R22.5	A:3-3.5;B:2-2.5	7-9


AGC28

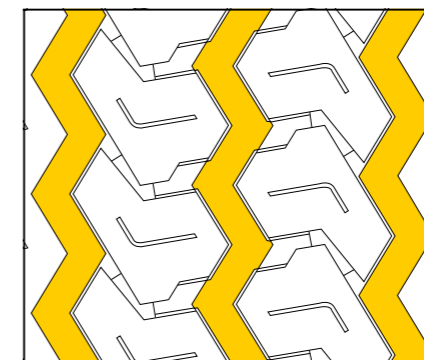

B A B

Size	Depth (mm)	Width (mm)
215/75R17.5	A:2.5;B:2	7-8
235/75R17.5	A:3;B:2	7-8
245/70R17.5	A:3;B:2	7-8
265/70R19.5	A:3;B:2	10-11
275/70R22.5	A:3-3.5;B:2-2.5	10-12
385/55R22.5	A:3-3.5;B:2-2.5	10-12
385/65R22.5	A:3-3.5;B:2-2.5	7-8
425/65R22.5	A:3-3.5;B:2-2.5	10-12
445/65R22.5	A:3-3.5;B:2-2.5	10-12

ADC53

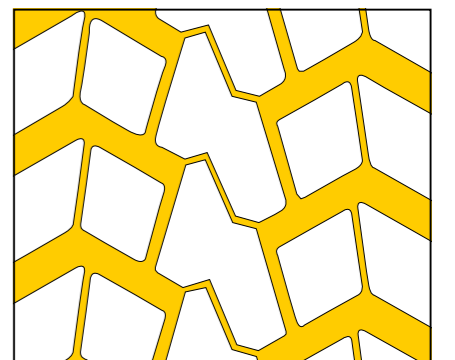

A B

Size	Depth (mm)	Width (mm)
11R22.5	2.5	A:10-12;B:5-7
12R22.5	2.5	A:10-12;B:5-7
13R22.5	2.5	A:10-12;B:5-7
315/80R22.5	2-2.5	A:10-12;B:5-7
12.00R24	2.5	A:10-12;B:5-7

NEO SERIES

WITH 100% WARRANTY!

NEO ALLROADS



NEO FUEL



NEO WINTER



The Aeolus NEO series - now with 100% guarantee! For a period of 2 years! High quality tyres with an impressively low price per kilometre and minimal wear. They are also in keeping with strict requirements in the transport sector.

All our tyres are produced under **Premium European Brand know-how & license.**

From casing structure to rubber compound! The NEO Series offers you top quality at a competitive price. The tyres can be retreaded and the casing is ideal

for tread renewal. We are clearly convinced by the quality of our tyres. So convinced that our tyres come with a two-year guarantee. So dare us by trying our NEO series.

Aeolus. **No matter what.**



For further information and the conditions, visit aeolus-tyres.com/warranty

AEOLUS
NO MATTER WHAT.

AEOLUS
NO MATTER WHAT

AEOLUS-TYRES.COM

AEOLUS
NO MATTER WHAT