




TRAZANO
PREMIUM TYRES

**ALL
STEEL TRUCK
& BUS RADIAL**


2021 TYRE CATALOGUE

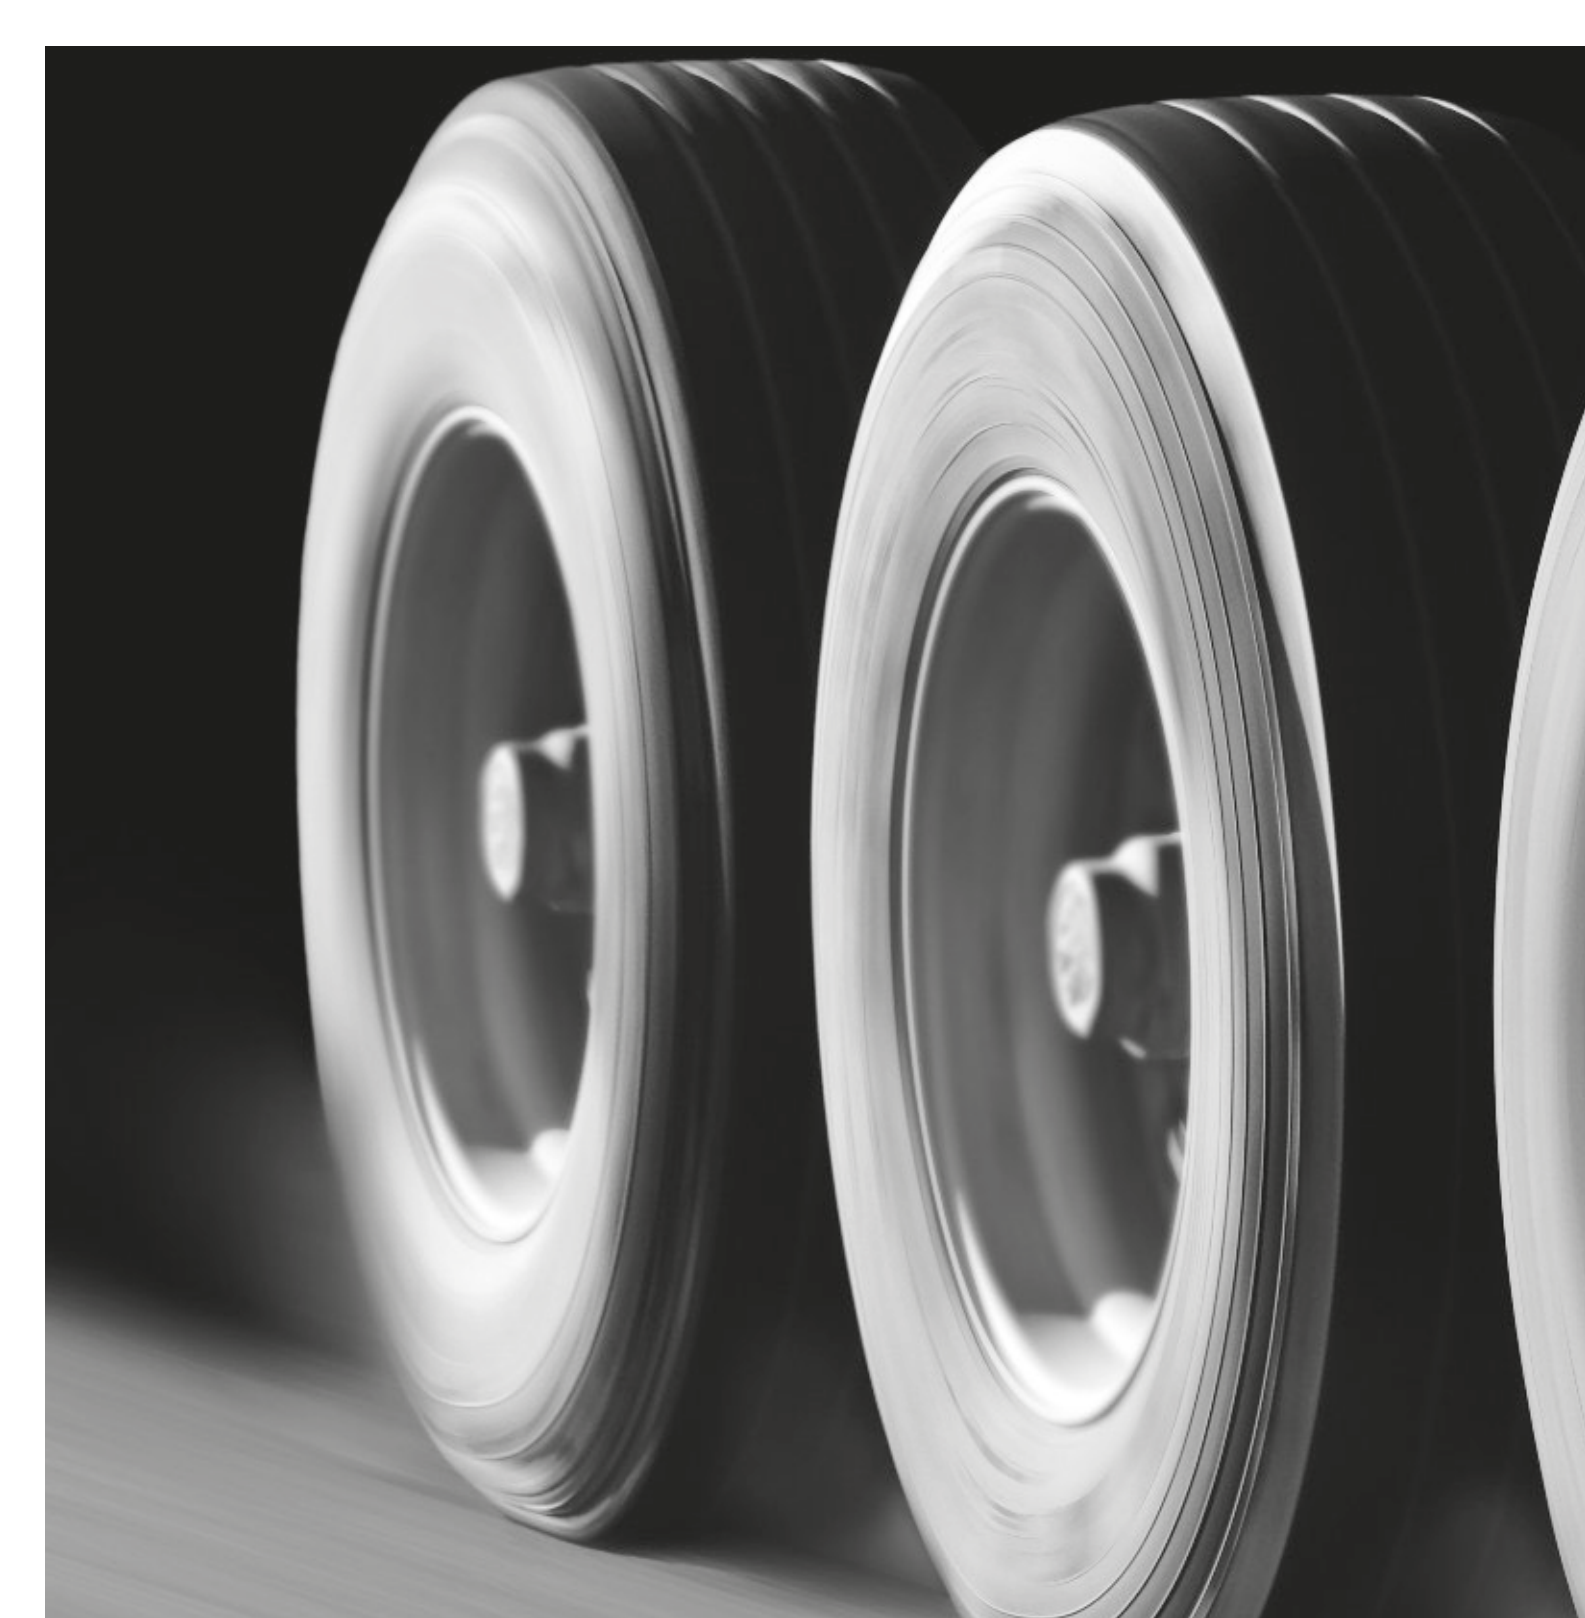



TRAZANO
PREMIUM TYRES

CONTENTS

L 	05 - 14
Long Haul		

R 	15 - 19
Regional		

M 	20 - 24
Mixed Service		

W 	25 - 27
Winter		

Eu Tyre Label	28
----------------------------	-----------

Regrooving Procedure	29 - 30
-----------------------------------	----------------



Long Haul

- Long distance journey with constant speed and less braking and accelerating
- Less fuel consumption and comfortable ride
- High mileage performance





Long Haul



Trans S

M+S

- Five ribs with four wide, straight grooves for precise handling and outstanding traction
- Stone rejector platforms prevent stones from lodging in grooves and drilling into belts
- Shallower tread depth helps to resist tread squirm and irregular wear forces for exceptionally long mileage



Wide-Base

Size	LR / PR	Service index			dB		Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure								
											Single				Dual				
												(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
255/70R22.5	H/16	140/137M	D	C	73	B	14.5	7.50	930	255	2500	5510	830	120	2300	5070	830	120	
275/70R22.5	H/16	148/145M	C	C	73	B	14.0	8.25	958	276	3150	6940	900	130	2900	6395	900	130	
295/80R22.5	J/18	154/149M	C	C	73	B	15.0	9.00	1044	298	3550	7830	900	131	3250	7160	900	131	



Trans D



- Designed to provide exceptional Performance and Life in Linehaul Drive applications
- Large block design helps enhance handling and traction on all season highway conditions
- Tread bars maintain an even footprint and help prevent tyre squirm
- Cool running compound to promote longer life, Great CPK performer



Size	LR / PR	Service index	E	C	dB	B	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure								
											Single				Dual				
												(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
295/60R22.5	J/18	150/147K	E	C	74	B	19.0	9.00	926	292	3350	7390	900	131	3075	6780	900	131	
315/70R22.5	L/20	154/150L	E	C	74	B	18.0	9.00	1020	312	3750	8270	900	130	3350	7390	900	130	
315/80R22.5	J/18	154/151M(156/150L)	E	B	74	B	20.6	9.00	1082	312	3750	8270	830	120	3450	7610	830	120	



Trans T

M+S

- Wide base trailer tyre specially designed for trailer service
- Special compound and strong tyre casing promise excellent tread wear and longer mileage
- Straight grooves help to reduce rolling resistance and improve fuel efficiency



Size	LR / PR	Service index			dB		Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
											Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)	
435/50R19.5	L/20	160J(156K)	C	C	72	B	13.5	14.00	931	438	4500	9920	900	131	-	-	-	-



Long Haul



Trans T

M+S

- Wide base trailer tyre specially designed for trailer service
- Special compound and strong tyre casing promise excellent tread wear and longer mileage
- Straight grooves help to reduce rolling resistance and improve fuel efficiency



Size	LR / PR	Service index			dB		Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
											Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)	
445/45R19.5	L/20	160J(156K)	C	C	72	B	14.3	15.00	895	446	4500	9920	900	131	-	-	-	-



Trans T

M+S

- Wide base multi-rib trailer tyres with durable compound to deliver excellent value
- Strong casing structure offers multiple retreads and lower total cost
- Improved tread design promises outstanding stability with optimized footprint and better tyre life



Size	LR / PR	Service index			dB		Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
											Single				Dual			
											(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
425/65R22.5	L/20	165K	C	C	73	B	15.0	12.25	1124	430	5150	11340	830	120	-	-	-	-
445/65R22.5	L/20	169K	C	C	73	B	15.0	13.00	1150	444	5800	12775	900	130	-	-	-	-



Long Haul






Novo Energy S



- Computer designed tyre structure provides excellent footprint profile and ensures superior comfort.
- Special tread compound guarantees low rolling resistance help to reduce fuel consumption.
- Straight tread pattern designed to minimize uneven wear.



Size	LR / PR	Service Index			dB		Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
											Single				Dual			
				(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)							
355/50R22.5	L/20	156K(154L)	D	C	73	B	14.0	11.75	928	361	4000	-	-	-	-	-	-	-
295/60R22.5	J/18	150/147K(149/146L)	D	C	73	B	14.5	9.00	926	292	3350	-	900	-	-	-	-	-
315/60R22.5	L/20	154/150L	D	C	73	B	13.5	9.75	950	313	3750	-	900	-	-	-	-	-



Long Haul

Novo Energy D



- Deep tread depth and wider tread with robust tread block produce outstanding traction on both dry and wet road surface.
- Special shoulder design with low-heating compound ensures less tread wear longer tyre life.
- Tread pattern designed to enhance mileage, traction and driving stability.



Size	LR / PR	Service index			dB		Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
											Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)	
295/60R22.5	J/18	150/147K(149/146L)	D	D	74	B	17.0	9.00	896	292	3075	-	900	-	-	-	-	-
315/60R22.5	L/20	154/150K(152/148L)	D	C	74	B	17.0	9.00	926	292	3350	-	900	-	-	-	-	-



Long Haul



Novo Trans S



- 5-Rib tread design enhances longer mileage.
- Computer designed tyre structure provides excellent footprint profile and ensures superior comfort and even wear.
- Special tread compound guarantees less fuel consumption with lower rolling resistance.
- Stone ejectors in U-shape grooves minimize the stone holding and penetration.



Size	LR / PR	Service index			dB		Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure								
											Single				Dual				
												(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
385/55R22.5	L/20	160K(158L)	C	C	71	A	15.0	12.25	996	386	4500	-	900	-	-	-	-		
385/65R22.5	J/18	158L(160K)	C	C	71	A	15.5	11.75	1072	389	4250	-	850	-	-	-	-		



Long Haul


Smart Trans T



- Super value tyre suitable for steer and trailer axle
- Multi kerf provides outstanding traction on wet and snow road surface
- Four grooves with zigzag designed provide excellent groove crack prevention



Size	LR / PR	Service index			dB		Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
											Single				Dual			
											(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
385/55R22.5	L/20	160K(158L)	C	B	73	B	13.0	12.25	996	386	4500	9920	900	130	-	-	-	-
385/65R22.5	L/20	160K(158L)	C	C	73	B	13.5	11.75	1072	389	4500	9920	900	130	-	-	-	-




Smart Trans S



- Super value tyre suitable for steer and trailer axle
- Multi kerf provides outstanding traction on wet and snow road surface
- Four grooves with zigzag designed provide excellent groove crack prevention



Size	LR / PR	Service index			dB		Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure								
											Single				Dual				
												(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
295/80R22.5	J/18	154/149M	C	C	73	B	14.0	9.00	1044	298	3550	7830	900	131	3250	7160	900	131	
315/70R22.5	L/20	156/150L	C	C	73	B	13.5	9.00	1014	312	3750	8270	900	130	3350	7390	900	130	
315/80R22.5	J/18	154/151M(156/153L)	C	C	73	B	14.0	9.00	1076	312	3750	8270	830	120	3450	7610	830	120	

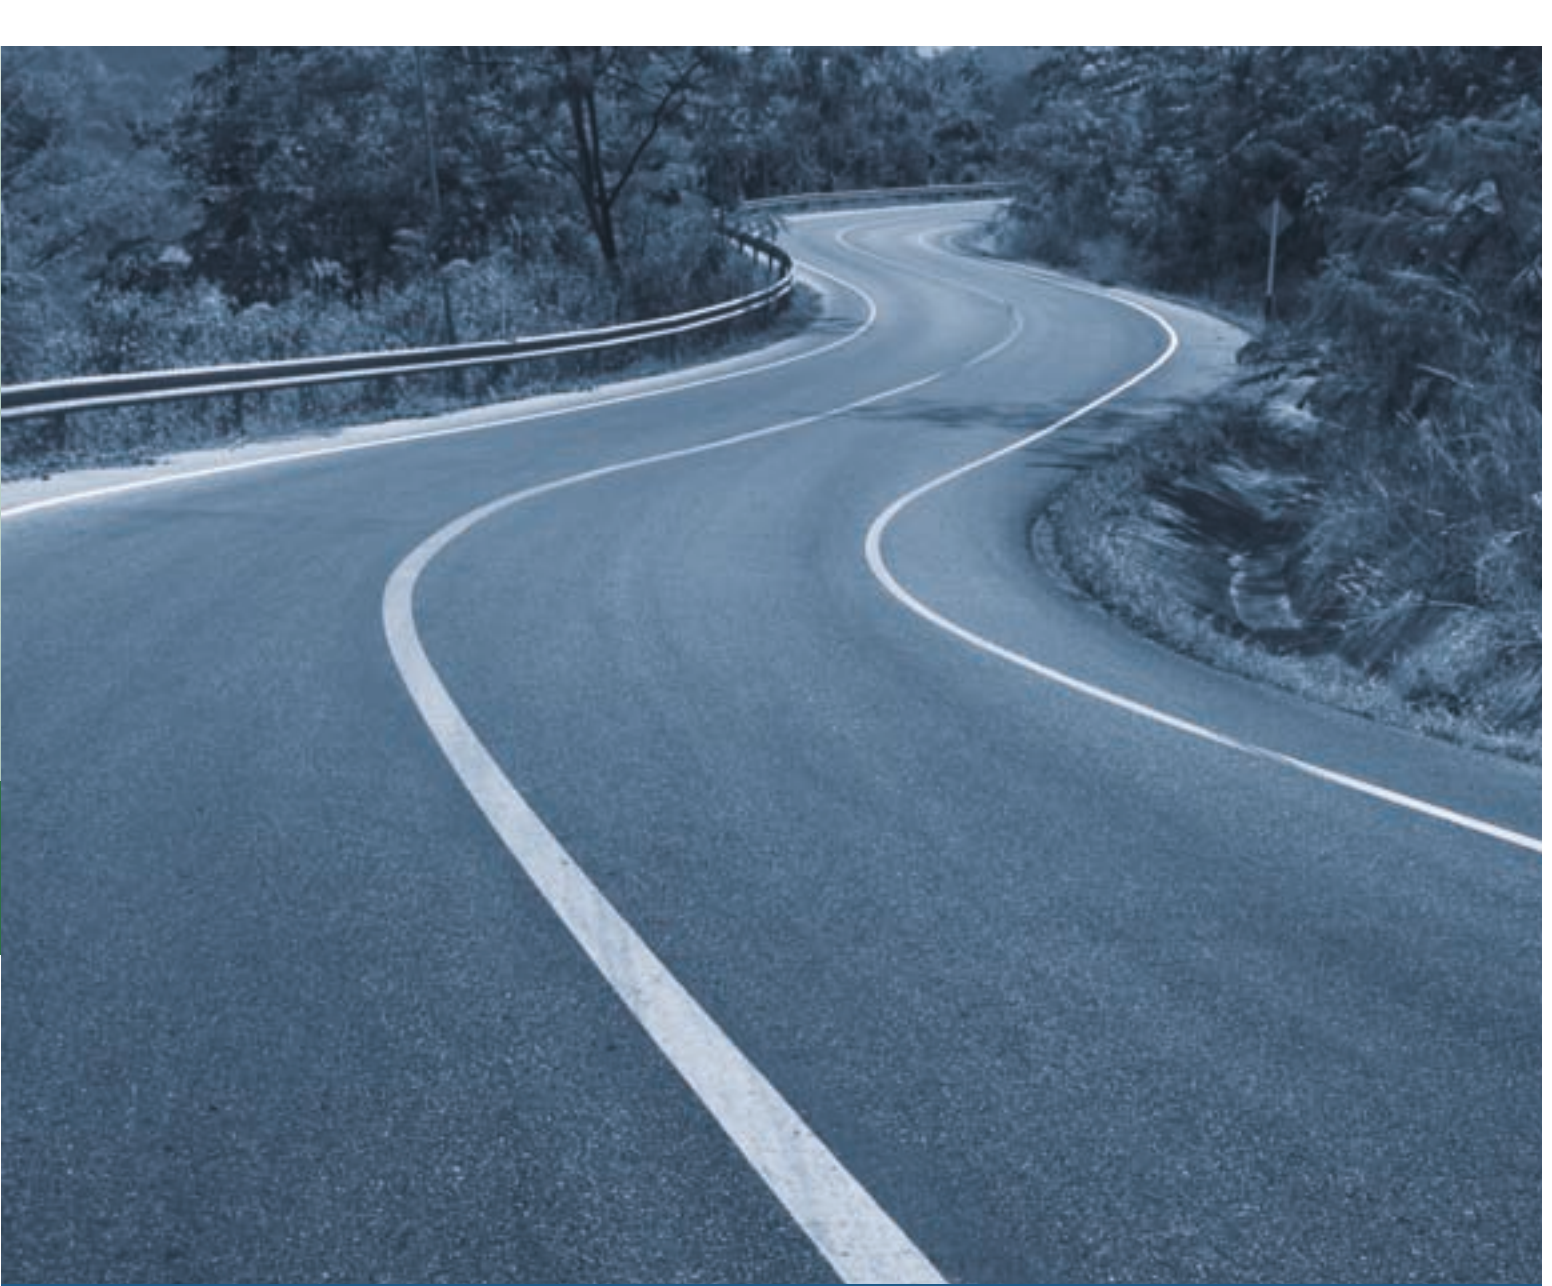

Regional

- Shorter journey with frequent braking, accelerating and turning
- Improved road grip with maximum mileage
- Exceptional tough type





Regional



Trans D



- New drive tyre designed for local and regional application with rims of 17.5" and 19.5".
- Deep tread depth and wider tread with robust tread blocks ensure outstanding traction on both dry and wet road surfaces.
- Excellent footprint design promises even wear and remarkable tyre life.



Size	LR / PR	Service index			dB		Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
											Single				Dual			
											(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
245/70R17.5	H/16	136/134M	E	D	74	B	15.0	6.75	789	248	2240	4940	850	123	2120	4675	850	123
205/75R17.5	G/14	124/122M	E	D	74	B	15.0	6.00	753	205	1600	3525	750	109	1500	3305	750	109
215/75R17.5	G/14	128/126M	E	D	74	B	15.0	6.00	767	211	1800	3970	760	110	1700	3750	760	110
225/75R17.5	G/14	129/127M	E	D	74	B	16.0	6.75	783	226	1850	4080	725	105	1750	3860	725	105
235/75R17.5	G/14	132/130M	E	D	74	B	16.0	6.75	797	233	2000	4410	775	112	1900	4190	775	112
265/70R19.5	H/16	140/138M	E	C	74	B	16.0	7.50	867	262	2500	5510	775	112	2360	5200	775	112
285/70R19.5	H/16	146/144M	E	C	74	B	16.0	8.25	895	283	3000	6610	850	123	2800	6175	850	123






Trans D



- Value tyre suitable for drive axle
- Special tread compound and tyre casing offers good tyre mileage for price sensitive customers
- Computer designed tread guarantees good traction for highway service in all season conditions



Size	LR / PR	Service index			dB		Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
											Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)	
295/80R22.5	J/18	152/149L	E	C	73	A	19.0	9.00	1050	298	3550	7830	900	131	3250	7160	900	131



Regional






Trans T



- New trailer tyres with advanced ZC-Rubber technology for long haul and regional application.
- Strong computer designed tyre casing guarantees outstanding capacity for heavy loads and highway.
- Special sipes alongside tread ribs help to minimize heating for high speed running with heavy loads.
- Special tread compound provides higher fuel efficiency with lower rolling resistance without sacrificing tyre mileage.



Size	LR / PR	Service Index	 	dB		Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
										Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
205/65R17.5	J/18	129/127K(132/132F)	D C	71	B	12.0	6.00	711	205	1850	4080	900	130	1750	3860	900	130
215/75R17.5	H/16	135/133J	D C	71	B	12.0	6.00	767	211	2180	4805	850	123	2060	4540	850	123
235/75R17.5	H/16	143/141J(144/144F)	D C	71	B	12.0	6.75	797	233	2725	6005	875	128	2575	5675	875	128
245/70R17.5	J/18	143/141J(146/146F)	D C	71	B	12.0	7.50	789	248	2725	6005	875	128	2575	5675	875	128
245/70R19.5	J/18	141/140J	C C	71	B	12.0	7.50	839	248	2575	5675	850	123	2500	5510	850	123
265/70R19.5	J/18	143/141J	C C	71	B	12.0	7.50	867	262	2725	6005	850	123	2575	5675	850	123
285/70R19.5	J/18	150/148J	C C	72	B	12.0	8.25	895	283	3350	7390	900	130	3150	6940	900	130





Novo Trans S



- Advanced 5-Rib tread provides even wear and remarkable handling.
- Specially designed tread pitches ensure low external noise.
- Tread sipes with straight tread grooves guarantee excellent water drainage and outstanding wet traction.
- Computer-aided design tyre casing promises good footprints to extend tyre life.



Size	LR / PR	Service index			dB		Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
											Single				Dual			
											(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
315/70R22.5	L/20	156/150L	C	B	73	B	15.0	9.00	1020	312	4000	-	900	-	3350	-	-	-
315/80R22.5	L/20	154/151M(156/153L)	C	B	73	B	16.0	9.00	1076	312	3750	-	830	-	3450	-	-	-



Novo Trans S



- Computer-aided design 5-Rib tread provides precise handling.
- Tread sipes alongside tread grooves offer outstanding wet operation and even tread contact on road surfaces.
- Advanced tyre casing design promises good footprints and avoids uneven wear.



Size	LR / PR	Service index	E	D	dB	dB	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
											Single				Dual			
				(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)							
245/70R17.5	H/16	136/134M	E	D	72	B	13.0	6.75	789	248	2240	-	850	-	2120	-	850	-
205/75R17.5	G/14	124/122M(126/124G)	E	D	72	B	12.0	6.00	753	205	1600	-	750	-	1500	-	750	-
215/75R17.5	G/14	128/126M	E	D	72	B	13.0	6.00	767	211	1800	-	760	-	1700	-	760	-
225/75R17.5	G/14	129/127M	E	D	72	B	13.0	6.75	783	226	1850	-	725	-	1750	-	725	-
235/75R17.5	G/14	132/130M	E	D	72	B	14.0	6.75	797	233	2000	-	775	-	1900	-	775	-
245/70R19.5	H/16	136/134M	D	D	72	B	13.0	7.50	839	248	2240	-	830	-	2120	-	830	-
265/70R19.5	H/16	140/138M	D	D	72	B	13.0	7.50	867	262	2500	-	775	-	2360	-	775	-
285/70R19.5	H/16	146/144M	D	D	72	B	13.0	8.25	895	283	3000	-	850	-	2800	-	850	-





Novo Trans D



- Deep tread depth ensures longer tyre life.
- Directional tread pattern and robust tread blocks produce outstanding traction on both dry and wet road surfaces.
- Excellent footprint design promises even wear and remarkable tyre life.
- Special shoulder design with low-heating compound minimizes shoulder heel & toe wear.
- Applicable for snow roads with excellent traction capabilities.



Size	LR / PR	Service index			dB		Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
											Single				Dual			
											(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
315/70R22.5	L/20	154/150L(152/148M)	D	B	75	B	19.0	9.00	1022	312	3750	-	900	-	3350	-	-	-
315/80R22.5	J/18	154/151M(156/153L)	D	B	75	B	21.0	9.00	1076	312	4000	-	850	-	3650	-	-	-



Regional



Novo Trans T



- Four grooves with zigzag designed provide excellent stone ejection and groove crack prevention
- Wide and solid shoulder design guarantee long mileage
- Stone ejectors in U-shape grooves minimize the stone holding and penetration
- Special tread compound guarantees less fuel consumption with lower rolling resistance



Size	LR / PR	Service Index	C	B	dB	B	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
											Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)	
385/55R22.5	L/20	160K(158L)	C	B	75	B	15.0	12.25	992	386	4500	-	900	-	-	-	-	
385/65R22.5	L/20	160K(158L)	C	B	75	B	15.0	11.75	1072	389	4500	-	900	-	-	-	-	



Mixed Service

- Used both on and off road
- Heavy loads and outstanding durability
- Special protection against the damage caused by the road condition





Mixed Service
On & Off



Terra T



- Aggressive multi-service, all position tread pattern promises excellent traction in ON/OFF road service
- Outstanding self-cleaning tread design ensures long-life service in ON/OFF road conditions
- Robust tread blocks and rugged casing allows for heavy loads and resist casing penetration and damage



Size	LR / PR	Service index			dB		Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
											Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)	
385/65R22.5	L/20	160K(158L)	D	C	73	B	18.0	11.75	1072	389	4500	9920	900	130	-	-	-	-
445/65R22.5	L/20	169K	D	C	73	B	18.0	13.00	1150	444	5800	12775	900	130	-	-	-	-



Mixed Service
On & Off






Terra S

M+S

- 3 circumferential grooves ensures good directional stability, even wear and smooth ride
- Heavy siping provides good braking stability and high lateral traction on wet and dry surface
- Improved tread compound helps resist tears and ensure good mileage in on and off road use
- Sidewall reinforcing ribs protects against impacts and scuffing



Size	LR / PR	Service index	 	dB		Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure								
										Single				Dual				
											(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
13R22.5	J/18	156/151K	D C	73	B	16.0	9.75	1124	320	4000	8820	875	128	3450	7610	875	128	
315/80R22.5	J/18	154/151M(156/150L)	D C	73	B	16.5	9.00	1076	312	3750	8270	830	120	3450	7610	830	120	



Mixed Service
On & Off



Terra D



- Premium tyre designed for drive position applicable for rough road surface
- Aggressive direction tread with robust tread blocks providing extra traction for on/off road condition
- Special rubber compound ensuring more resistance to cuts and tearing



Size	LR / PR	Service index	E	C	dB	E	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure								
											Single				Dual				
												(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
13R22.5	J/18	156/151K	E	C	74	B	23.0	9.75	1136	320	4000	8820	875	128	3450	7610	875	128	
315/80R22.5	J/18	154/151L(156/150K)	E	B	74	B	23.0	9.00	1076	312	3750	8270	830	120	3450	7610	830	120	
295/80R22.5	J/18	152/149K	E	B	74	B	21.0	9.00	1050	298	3550	7830	900	131	3250	7160	900	131	



Mixed Service
On & Off



Smart Terra D



- Super value tyre applicable for mixed service
- Aggressive blocks provides outstanding traction on rough roads
- Open shoulder tread design help promote self-cleaning ability



Size	LR / PR	Service index			dB		Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
											Single				Dual			
										(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)	
315/80R22.5	J/18	154/151M(156/153L)	D	D	74	B	19.0	9.00	1082	312	3750	8270	830	120	3450	7610	830	120
13R22.5	J/18	156/151K	D	B	74	B	19.0	9.75	1136	320	4000	8820	875	128	3450	7610	875	128



Winter

- Designed for winter use only
- Extraordinary traction on snow and ice road surface





Winter



Artic S



- New Steer tyre with latest technology for winter application.
- Wide and deep circumferential grooves enhances removal of snow and ice.
- Specific tread compound keep rubber softness in low temperature with good performance.
- Wide tread with advanced block and sipe design provides extra traction for snow and ice road conditions.



Size	LR / PR	Service index	E	C	dB	Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure								
										Single				Dual				
											(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)
315/70R22.5	L/20	154/150K(152/148L)	E	C	73	B	17.0	9.00	1020	312	3750	8250	900	130	3350	7390	900	130
315/80R22.5	J/18	154/151M(156/153L)	E	C	73	B	18.0	9.00	1076	312	3750	8270	830	120	3450	7610	830	120



Winter



Artic D




- New drive tyre with latest technology for winter application.
- Wide open shoulder deliver additional traction without compromising tread life.
- Specific tread compound keep rubber softness in low temperature with good performance.
- Studable tread design provides extra traction for snow and ice road conditions.



Size	LR / PR	Service index			dB		Tread Depth (mm)	Standard Rim	Overall Diameter (mm)	Section Width (mm)	Max. Load Capacity at Cold Inflation Pressure							
											Single				Dual			
				(kg)	(lbs)	(kPa)	(psi)	(kg)	(lbs)	(kPa)	(psi)							
315/70R22.5	L/20	154/150K(152/148L)	E	C	74	B	19.0	9.00	1020	312	3750	8250	900	130	3350	7390	900	130
315/80R22.5	J/18	156/153K(154/151L)	E	C	74	B	21.0	9.00	1082	312	4000	8820	850	123	3650	8050	850	123



REGROOVING PROCEDURE




W: regrooving width
D: regrooving depth

Regrooved pattern is shown in black.
Recut depth listed is maximum value.
Recut width listed has ± 1 mm tolerance

Long Haul




Trans S



Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
255/70 R 22.5	2.0mm	7.0mm
275/70 R 22.5	2.0mm	7.0mm
295/80 R 22.5	2.0mm	7.0mm




Trans D



Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
295/60 R 22.5	2.0mm	7.0mm
315/70 R 22.5	2.0mm	7.0mm
315/80 R 22.5	2.0mm	7.0mm




Trans T



Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
435/50 R 19.5	2.0mm	7.0mm




Trans T



Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
445/45 R 19.5	2.0mm	7.0mm



Trans T




Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
425/65 R 22.5	2.0mm	7.0mm
445/65 R 22.5	2.0mm	7.0mm

Regional




Trans D



Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
245/70 R 17.5	2.0mm	7.0mm
205/75 R 17.5	2.0mm	7.0mm
215/75 R 17.5	2.0mm	7.0mm
225/75 R 17.5	2.0mm	7.0mm
235/75 R 17.5	2.0mm	7.0mm
265/70 R 19.5	2.0mm	7.0mm
285/70 R 19.5	2.0mm	7.0mm




Trans D



Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
295/80 R 22.5	2.0mm	7.0mm




Trans T



Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
205/65 R 17.5	2.0mm	7.0mm
215/75 R 17.5	2.0mm	7.0mm
235/75 R 17.5	2.0mm	7.0mm
245/70 R 17.5	2.0mm	7.0mm
245/70 R 19.5	2.0mm	7.0mm
265/70 R 19.5	2.0mm	7.0mm
285/70 R 19.5	2.0mm	7.0mm




Novo Trans S



Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
245/70 R 17.5	2.0mm	7.0mm
205/75 R 17.5	2.0mm	7.0mm
215/75 R 17.5	2.0mm	7.0mm
225/75 R 17.5	2.0mm	7.0mm
235/75 R 17.5	2.0mm	7.0mm
245/70 R 19.5	2.0mm	7.0mm
265/70 R 19.5	2.0mm	7.0mm
285/70 R 19.5	2.0mm	7.0mm




Novo Trans S



Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
315/70 R 22.5	2.0mm	7.0mm
315/80 R 22.5	2.0mm	7.0mm




Novo Trans D



Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
315/70 R 22.5	2.0mm	7.0mm
315/80 R 22.5	2.0mm	7.0mm




Novo Trans T



Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
385/55 R 22.5	2.0mm	7.0mm
385/65 R 22.5	2.0mm	7.0mm




Novo Energy S



Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
355/50 R 22.5	2.0mm	7.0mm
295/60 R 22.5	2.0mm	7.0mm
315/60 R 22.5	2.0mm	7.0mm




Novo Energy D



Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
295/60 R 22.5	2.0mm	7.0mm
315/60 R 22.5	2.0mm	7.0mm




Novo Trans S



Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
385/55 R 22.5	2.0mm	7.0mm
385/65 R 22.5	2.0mm	7.0mm




Smart Trans T



Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
385/55 R 22.5	2.0mm	7.0mm
385/65 R 22.5	2.0mm	7.0mm



Smart Trans S




Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
295/80 R 22.5	2.0mm	7.0mm
315/70 R 22.5	2.0mm	7.0mm
315/80 R 22.5	2.0mm	7.0mm

Mixed Service




Terra T



Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
385/65 R 22.5	2.0mm	7.0mm
445/65 R 22.5	2.0mm	7.0mm




Terra S



Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
13 R 22.5	2.0mm	7.0mm
315/80 R 22.5	2.0mm	7.0mm




Terra D



Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
13 R 22.5	2.0mm	7.0mm
315/80 R 22.5	2.0mm	7.0mm
295/80 R 22.5	2.0mm	7.0mm



Smart Terra D




Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
315/80 R 22.5	2.0mm	7.0mm
13 R 22.5	2.0mm	7.0mm

Winter




Artic S



Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
315/70 R 22.5	2.0mm	7.0mm
315/80 R 22.5	2.0mm	7.0mm



Artic D



Tyre Size	Dimension of Regroove	
	Depth (D)	Width (W)
315/70 R 22.5	2.0mm	7.0mm
315/80 R 22.5	2.0mm	7.0mm



